ROUTE CONCEPT REPORT



STATE ROUTE 39 BEACH BOULEVARD

12-ORA P.M. 0.00/23.19



JUNE 2000



ROUTE CONCEPT REPORT



STATE ROUTE 39 BEACH BOULEVARD



12-ORA P.M. 0.00/22.60

PREPARED BY DISTRICT 12 DIVISION OF PLANNING

JANUARY 2001

(
+	
*	
ŧ	_
	_
-	-
-	人
F	
1	
-	1
7	-
,	-
1	
	=
7	-
,	-
•	
1	_
6	~
- 5	_
(
1	_
•	7
1	1
-	
1	
)	T
)	_
,	-
1	人
(-
1	-
1	1
1	

Recommended for Approval by:

Approved by:

Date	GAIL FARBER District Division Chief District 12
Date	KEN NELSON Interim District Director District 12

ROUTE CONCEPT REPORT STATE ROUTE 39 BEACH BOULEVARD 12-ORA-PM 0.00/23.19 SUMMARY

STATE ROUTE 39

to Whittier Blvd (SR-72) and then east on SR-72 for about a 1/4 of mile where it ends at as a connecting link in the regional arterial network by providing a direct access to the Hacienda Blvd in the City of La Habra. four freeways. San Diego (I-405), Garden Grove (SR-22), Artesia (SR-91), and Santa Ana (I-5) regional recreational areas including Knott's Berry Farm and the beaches. It also serves local access to adjacent residential, commercial, retail, industrial centers, and major Beach to La Habra. It is classified as State Highway - Conventional. The route provides County. It is a major north-south arterial that connects communities from Huntington Highway (SR-90) that are located in the City of La Mirada which is part of Los Angeles County except for two small portions that are between Rosecrans Avenue and Imperial State Route 39 (SR-39) known as Beach Boulevard is located entirely within Orange On weekdays SR-39 is heavily used by commuters to provide access to these SR-39 begins at SR-1 in the City of Huntington Beach and travels north

Segment 5 which includes the interchanges at I-5 and SR-90 currently operates at LOS weekends and on holidays due to entertainment, recreational and coastal attractions. during the week in both AM and PM peak periods. There is also congestion during Angeles County Line to 60,000 at Warner Avenue. Travelers experience congestion The Average Daily Traffic (ADT) on Beach Boulevard ranges from 29,000 at the Los

ROUTE CONCEPT

been divided into 7 segments shown below: anticipated that longer traffic delays will occur. For planning purposes, the route has reduce the duration of congestion. If no major capital improvements are made, it is The concept for this route is to provide the best Level of Service (LOS) possible and

4 Lanes LOS C	4 Lanes LOS C 4 Lanes LOS C	SR-72/Hacienda Blvd.	20.7/23.1	7 ·
6 Lanes LOS E	6 Lanes LOS C	SR-90/SR-72	19.1/20.7	6
6 Lanes LOS FI	6 Lanes LOS FO 6 Lanes LOS FI	I-5/SR-90	15.0/19.1	5
6 Lanes LOS F2	6 Lanes LOS D	SR-91/I-5	14.3/15.0	4
8 Lanes LOS F1	8 Lanes LOS C	SR-22/SR-91	8.4/14.3	w
8 Lanes LOS E	8 Lanes LOS C	I-405/SR-22	5.8/8.4	2
6-8 Lanes LOS FO	6-8 Lanes LOS E	SR-1/I-405	0.0/5.8	_
# OF LANES/PEAK HOUR LOS	EXISTING	LIMITS	SEG POSTMILE LIMITS	SEG
2020 CONCEPT				


Capacity enhancements are not recommended or feasible. Management (TSM) and Transportation Demand Management (TDM) techniques. Technology and Intelligent Transportation Systems (ITS), Transportation System The SR-39 concept calls for continued use and development and expansion of New

This included adding capacity, new technology, and TSM techniques, including 1 through 5 as part of the SmartStreet Program. The project was completed in 1999. The previous route concept for SR-39 called for completion of the SmartStreet Program. In that concept report the addition of arterial lanes was specified for Segments

Beach Boulevard was the first SmartStreet completed in Orange County. The SmartStreet Program is included in the route concept for SR-39. An additional project Interchange, but this project has not yet been funded or programmed. has been proposed to add a lane in each direction at the Beach Boulevard/SR-1 Boulevard was selected as Orange County's first SmartStreet Project and in May 1999, years. The SmartStreet Program for Orange County was adopted by the OCTA in June phases: short-term (0-5 years), intermediate term (6-15 years), and long-term (15-20) implemented in 1989 and the improvements were divided into three implementation Transportation Authority (OCTA) and local cities along the route. The program was 1984, which identified a 220-mile arterial network of SmartStreets. In 1984, Beach (SR-90) is a comprehensive improvement program coordinated with the Orange County The Beach Boulevard SmartStreet Project between PCH (SR-1) and Imperial Highway

deteriorate even further since added capacity is not feasible for this route. SmartStreet features such as ITS, TSM, and TDM it is likely that the concept LOS would at an acceptable LOS of between "D" to "E" in 2020. Without improved and additional concept LOS of between "FO" to "F1". Only Segments 2, 6, & 7 are expected to operate segment is "F1" and for Segment 4 it is "F2". Several other segments (1,3, & 5) have a SR-39 is currently operating at LOS "FO" in Segment 5. The concept LOS for this

LOCATION MAP

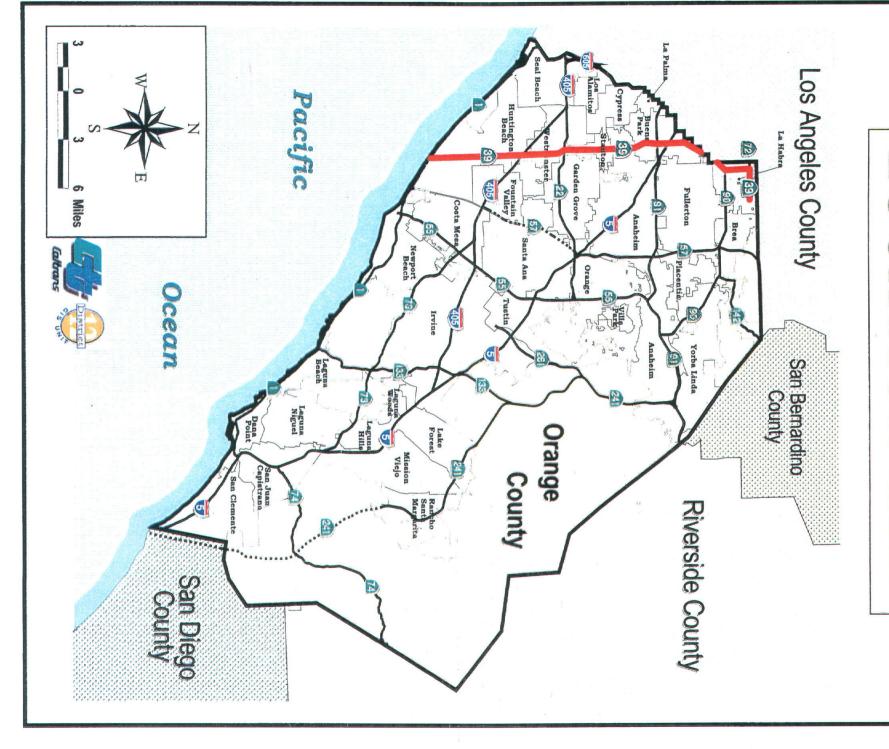

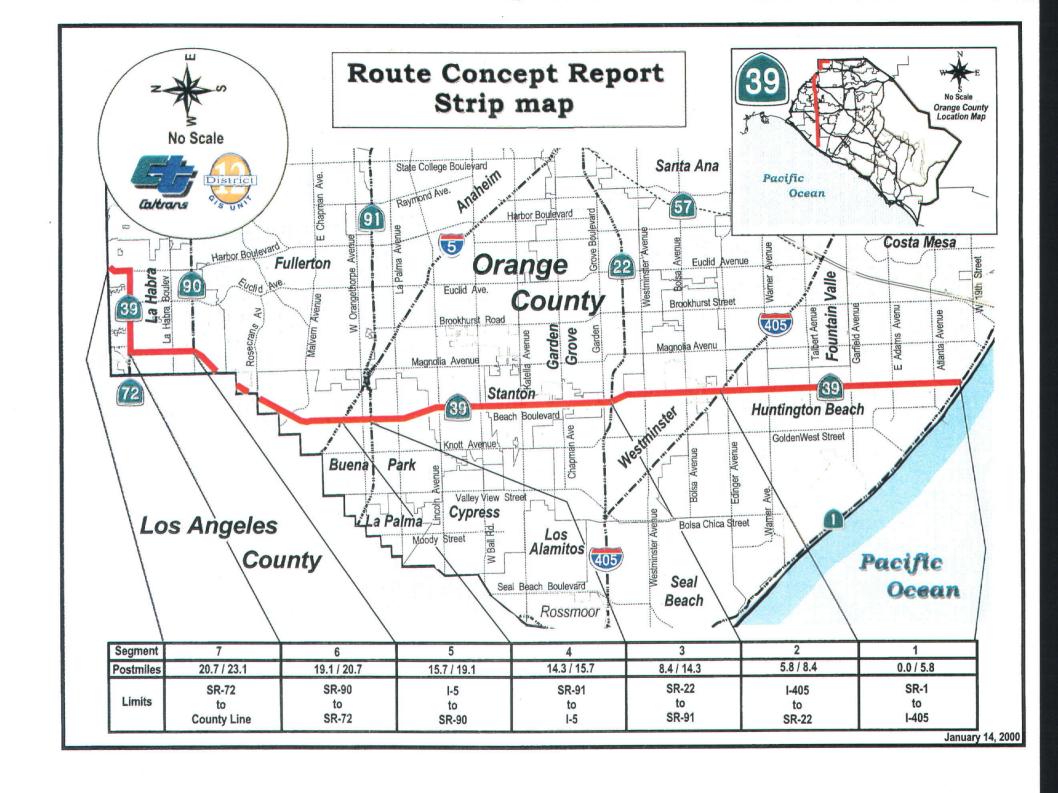


TABLE OF CONTENTS

6 (City of La Habra)	Segment 5. 6 (City of
of La Mirada)13	
(City of Fullerton)	Segment 4, 5 (City of
(City of Buena Park)13	4
(City of Anaheim)12	Segment 3, 4 (City
(City of Stanton)	$\overline{\Omega}$
(City of Garden Grove)	3
City of Westminster)11	2
(Huntington Beach)11	_
3LEM IDENTIFICATION11	CURRENT ISSUES/PROBLEM IDENTIFICATION
∟∧шон ∠а — гиgпwаулашчар10a	Evinoit za – m
	Hamour Z House
Metrolink System Man	Evhibit 2 — Metroli
tere 0	Transportation Centers
	1
	-
IIICS	Picual Englished
lities	Dark and D
TRANSPORTATION8	MULTIMODAL TRANS
8	Military Operations
Exhibit 1 – Route Concept – North/South Split7	Exhibit 1 – Route C
on Growth5	Land Use/Population Growth.
Facilities5	Parallel Alternative Facilities
5	ROUTE ANALYSIS
ement Program5	Congestion Management Program
ation4	SmartStreet Designation
4	Orange County
Federal/State Functional Classification4	Federal/State Funct
CLASSIFICATION3	ROUTE PURPOSE AND CLASSIFICATION
3	History
ROUTE DESCRIPTION –STATE ROUTE 39 (SR-39)	ROUTE DESCRIPTION -
	DISTINCT INCLUDE
٥	DISTRICT PROFILE
VING INTENT1	STATEMENT OF PLANNING INTENT

22	TABLE 8: ADT Summary Page
	? .
1/	٠, ن
15	
15	
8	2:
6	::
	LIST OF TABLES
22	ADT SUMMARY TABLE – Table 8
21	LEVEL OF SERVICE (LOS) COMPARISON CHART - Table 7
20	Segment 7 PM (20.7/23.1)
20	Segment 6 PM (19.1/20.7)
20	Segment 5 PM (15.7/19.1)
20	Segment 4 PM (14.3/15.7)
20	Segment 3 PM (8.4/14.3)
19	Segment 2 FM (2.0/0.4)
10	Segment 2 DM (5 8/8 1)
19	Segment 1 PM (0.0/5.8)
19	Regional Consistency
19	Introduction
19	ROUTE CONCEPT
18	PPROGRAMMED PROJECTS
17	Accident Rates - Automobiles
16	Exhibit 3 – Truck Percentage of ADT Map
15	Traffic System Management
15	Goods Movement - Truck Volumes
lary14	Transportation Modeling Description and Socioeconomic Summary
14	Average Daily Traffic
14	Introduction
14	TRAFFIC ANALYSIS

APPENDIX 1 – Graphic Representation & Definition of LOS
APPENDIX 2 - Segment Summary Pages
APPENDIX 3 – Bikeway Classifications
APPENDIX 4 – New Technology
APPENDIX 5 – Urban Freeway Standards
APPENDIX 6 – Concept System Configuration
APPENDIX 7 - Mitigation Measures
APPENDIX 8 – Acronyms
APPENDIX 9 - References

LIST OF APPENDICES

ROUTE CONCEPT REPORT

STATEMENT OF PLANNING INTENT

regional agency staff. Reports are prepared in the districts and represent the combined expertise of district, local and proposed land use and projected travel demand over a 20-year planning period. Route Concept Department's judgment on what the characteristics of each state highway should be in response to The Route Concept Report (RCR) is an internal planning document which expresses the

and project development documents. For purposes of this report, projects under construction are development of the District System Management Plan (DSMP) and other state and local planning project development documents such as Project Study Reports (PSRs), Environmental goals. More specific design and operational detail will be included and analyzed in subsequent Service (LOS). It broadly identifies the nature and extent of improvements needed to reach those The RCR contains the Department's goals for the development of each route in terms of Level of included as existing. Documents, Project Reports and Preliminary and Final Design Reports. RCR's are used in the

Service and Appendix 6 - Concept System Configuration. the roadway. The alternatives for SR-39 (peak hour/peak direction LOS) are shown in Table 8 report is based on the ratio of Year 2020 forecast volumes to facility capacity for each segment of The traffic data for this report has been prepared for the following alternatives: Base Year 1997, Configurations for these 3 alternatives are displayed in Appendix 6. The Concept LOS for this Year 2020 Null (projects under construction and funded), and Year 2020 Concept. System (ADT Summary Page). See Appendix 1 - Graphic Representation and Definition of Level Of

designating segment limits and other significant points along this route. It was decided that it in use throughout the District. System Planning documents when the postmile system is converted and a standard set of data is the planning process. System Planning will begin using the metric system in RCRs and other would be inappropriate for System Planning to perform even "soft conversions" at this point in In developing this RCR, the System Planning Branch considered using the metric system for

project planning and design. Changes that occur during project development may require move through the project development stages, with final determinations made at the time of new information is obtained. The nature and size of identified improvements may change as they Information contained in the RCR is subject to change as conditions and priorities change and as revision of the RCR.

Southern California Association of Governments (SCAG) were referenced for this RCR. Management Agency (OCEMA), Orange County Transportation Authority (OCTA), and and Programming, and external documents from the County of Orange Environmental review of previous RCRs prepared for this route, projects under construction, and analysis of Preparation of this report included field reviews, review of planned and programmed projects, Level of Service (LOS). Internal documents from Traffic, Maintenance, Project Development

undertaken to ensure consideration of external issues impacting this route. Coordination with the Advanced Planning/Intergovernmental Review Branch was also

DISTRICT PROFILE

attractions and numerous planned residential communities. includes major financial centers, commercial and industrial developments, major tourist one (31) cities and several unincorporated areas. The county's diversified economic base District 12 (Orange County) is an urbanized area of approximately 786 square miles with thirty-

miles and characterized by distinct internal differences in climate, topography and economy. by 2020. Orange County is in the South Coast Air Basin (SCAB)/South Coast Air Quality Population in the region was 15.7 million residents in 1994 and is projected to reach 22 million Orange, Riverside, San Bernardino, Ventura, and Imperial. The region covers 38,000 square From the regional planning perspective, Orange County is part of the Southern California District (SCAQMD) planning area. Association of Governments (SCAG) comprised of 180 cities and 6 counties: Los Angeles,

916,000 units to 1.1 million units. Employment will increase from the current 1.2 million jobs to 2.6 million is projected to increase to 3.2 million. Housing units are expected to increase from Orange County is experiencing tremendous growth. By 2020, the county's current population of 2.1 million jobs by 2020.

Orange County freeways; the largest number of full-time HOV lanes in California. which include 80 route miles of high occupancy vehicle (HOV) lanes currently operating on Toll Road System, and 4 are Conventional Highway. There are 247 route miles of highway, County. They are N/S and E/W routes; 2 are Interstate and 13 are State Routes - 5 are part of the There are fifteen (15) existing and proposed Interstate and State Routes traversing Orange

ROUTE DESCRIPTION - STATE ROUTE 39 (SR-39)

airport used mostly by private citizens and for training purposes. passes through fully developed portions of the county and is considered flat. The Fullerton of the route is 23.199 miles long and passes through 9 cities: Huntington Beach, Westminster, Pacific Coast Hwy (SR-1) to Whittier Blvd (SR-72) located in Los Angeles County. The length sections that pass through Los Angeles County in the City of La Mirada. It provides access from Airport is approximately ½ mile east off of Route 39. This airport is a small non-commercial Garden Grove, Stanton, Anaheim, Buena Park, Fullerton, La Mirada and La Habra. The route SR-39 is a critical north-south route located entirely within Orange County except for two short

Knotts Berry Farm, The Wax Museum, Mid-Evil Times and Wild Bills of the number of attractions along the route that are within the city. The part of the route that passes through Buena Park is named the entertainment corridor because These attractions include

coast, a fact that gives this street its name. busiest surface street and serves as a traditional route from the county's northwest corner to the during the weekdays as well as on weekends. SR-39, known as Beach Boulevard is the county's The route provides direct access to the coastal cities and is heavily used for commuting purposes

first completed SmartStreet and commuters have reported significant timesaving on this route. arterial highways in Orange County. In May 1999, Beach Boulevard became Orange County's SR-39 is part of the SmartStreet Program which is a 220-mile network of high thoroughfare

lane highway to Whittier Boulevard and again decreases to 4-lanes at Hacienda. decreases to 6-lanes then to 4-lanes at the I-5 junction. It then continues at Manchester as a 6-6-lanes. From Talbert Street to Lincoln Avenue the route is predominantly 8-lanes. At SR-91 it left-turn lanes plus 1 right-turn lane; N/B is 3-lanes. The section from Atlanta Street to Adams is The number of lanes on this route varies from 4 to 8. At SR-1 the S/B direction has 1 lane plus 2

History

direct access from inland Orange County to the coastal areas honor of the "Road to Summer". It is the only north-south conventional route that provides officials, seeing the unified nature of the road designated the entire route as SR-39. Hampshire Street, Huntington Beach Boulevard, Route 62, and Route 171. In 1933, State Over the years SR-39 has had many names. These include: La Habra Road, Grand Avenue, Orange County street naming committee decided to name the entire route Beach Boulevard in

SR-39 was first adopted as a State Highway - Conventional Route between Northern Station Lincoln Ave. to La Palma Ave. in December of 1941. Ave. was added in June of 1937; from 22nd St. to Lampson Ave. in August of 1939; and from (rail station) and Ocean Avenue in November of 1935. The section(s) from Coast Blvd. to Ocean

1968, but later rescinded by the California Highway Commission in March of 1975 A freeway portion of the route was adopted between Route 1 and Lampson Ave. in October of

ROUTE PURPOSE AND CLASSIFICATION

recreational traffic State Routes for commuters. On weekends and holidays this route carries a significant amount of SR-22, SR-91, SR-90 SR-72). During weekdays, this route provides access to the Interstate and business corridor. The route intersects 2 Interstates (I-405 and I-5) and 5 State Routes (SR-1, areas along SR-1. The route also serves as a major commuter, commercial, entertainment and (including parts of Los Angeles County). It also provides access to the many coastal recreational between Huntington Beach (including other coastal communities) and north Orange County SR-39 serves 3 primary purposes in the north Orange County area. It serves as a commuter route

Federal/State Functional Classification

movement of Extra Legal Loads (SHELL). It is however, designated as a Terminal Access Route designated as part of the National Network for STAA Trucks and Sub-System of Highway for the SR-39 is classified as Principal Arterial – Urban for the entire length of the route. It is not to the Network.

Orange County

as follows: The Orange County Master Plan of Arterial Highways (MPAH – January 1999) identifies SR-39

19.1/23.1		14.3/19.1		0.00/14.3	Postmile
SR-90 to SR-72 (Whittier Boulevard)		SR-91 to SR-90 (Imperial Highway)		SR-1 (PCH) to SR-91 (Artesia Freeway)	Limits
Major Arterial (6 lanes)	SmartStreet	Major Arterial (6 lanes)	SmartStreet	Principal Arterial (8 lanes)	Designation

Segment 1 entirely as 8 lanes arterial. In Segment 1 of this RCR, the section from SR-1 to only. Currently, SR-39, Segment 1 is partially inconsistent with the MPAH. The MPAH shows State Freeways and Transportation Corridors are shown on the MPAH for reference purposes Talbert is 6 lanes, and the section from Talbert to I-405 is 8 lanes

SmartStreet Designation

management techniques that facilitate a smooth, relatively uninterrupted flow of traffic that employ a combination of street widening, signal synchronization, bus turnouts, multi-lane turn pockets (right or left), intersection improvements and other transportation system wide approach to improving traffic flow. SmartStreets are high thoroughfare arterial highways SR-39 is part of the SmartStreet System, a concept developed in the early 1980's as a corridor-

arterial network of SmartStreets. In December 1984, Beach Boulevard was selected as Orange County in June 1984, which identified 21 regionally significant roads comprising a 220-mile Orange County in May 1999 have been completed. Beach Boulevard was dedicated as the first completed SmartStreet in The Orange County Transportation Authority adopted the SmartStreets Program for Orange County's first SmartStreet project. All lane additions for the SmartStreet Program on SR-39

integrated approach to making transportation programming decisions of Proposition 111 in 1990. It is an effort to reduce congestion by improving the relationship Congestion Management Program

The CMP is a legislatively required countywide program that became effective with the passage between land use, transportation, and air quality. The purpose of the CMP is to develop an

Program (CMP): Adams Avenue, Warner Avenue, I-405 I/C, Bolsa Avenue, Katella Avenue, La Palma Avenue, SR-91 I/C, Orangethorpe Avenue, SR-90 (Imperial Highway), and SR-72 intersections on SR-39 meet the LOS standards. intersections that do exceed CMP LOS limitations, mitigation measures must be implemented to The following key intersections on SR-39 are designated as part of the Congestion Management bring the intersection LOS into compliance with CMP standards. Currently, all CMP (Whittier Boulevard). Certain LOS standards are set by the CMP that cannot be exceeded. For

ROUTE ANALYSIS

number of environmentally sensitive areas in Segments 1-6. The Average Daily Traffic (ADT) divided highway with a median. The terrain is flat and the entire route is urbanized. There are a volume ranges from a high of 60,000 at Warner Avenue to a low of 29,000 at the Los Angeles entire length of the route. The number of lanes ranges from 4 to 8. The majority of the route is a State Route 39 - Beach Boulevard is designated as State Highway - Conventional throughout the

Parallel Alternative Facilities

Mirada Blvd from SR-39 to SR-72. St/Idaho St from Commonwealth Ave to SR-72; and Magnolia St from SR-1 to Commonwealth Orangethorpe Ave; Stanton Ave from Orangethorpe Ave to Commonwealth Ave; Gilbert there is Newland St from SR-1 to Garden Grove Blvd; Dale St. from Garden Grove Blvd to Av. To the west of SR-39 there is Goldenwest St/Knott Ave from SR-1 to Artesia Blvd; and La There are no Interstate or State Routes that run parallel to SR-39 that would serve as an alternate Some of the main arterials that run parallel to portions of SR-39 are: To the east of SR-39

Land Use/Population Growth

usually border freeways and major arterials. government land such as former Navy and Marine bases. Industrial and commercial uses institutional/university professional office space, medical centers, and large holdings of residential, small boat harbors and airports, with pockets of retail commercial, light industrial and within or adjacent to the boundaries of the national forest is developed. The primary land use is and Camp Pendleton Marine Corps Base to the south. The majority of the land in the county not metropolitan area with the Pacific Ocean to the west, the Cleveland National Forest to the east with the exception of Route 74. The county is a continuation of the greater Los Angeles For transportation planning purposes, Orange County is considered to be a fully urbanized county

page, Route Concept County North/South Split. street pattern meanders with the contour of the land. For example, Irvine and Mission Viejo are a north/south arterial grid. South County lies South of Santiago Canyon Road and Silverado basically laid out on the old land grants and ranches of the area. See Exhibit 1 on the following Canyon Road and east of SR-55. South county contains much more new development and the Silverado Canyon Road. In this older portion of the county, most of the street system is based on County Line. North County lies west of SR-55 and north of Santiago Canyon Road and Avenue to Santiago Canyon Road east to Silverado Canyon Road east to the Orange/Riverside Newport Beach to Chapman Ave in Orange. The dividing line then turns east on Chapman For the purposes of this report, the county is roughly divided into north and south by SR-55 from

continue to be the more populous area of the county. See Table 1 - Population numbers, the county population distribution in 2020 is projected to be 57% in the north and 43% Growth/Distribution - 2020. population is expected to grow to approximately 3.2 million (19% increase). Given these Based on 1997 estimates, Orange County's population is 2.7 million. By the year 2020 the Although the majority of growth is expected to occur in the south, the north will

and 45% in the South. As with the population projections, the majority of growth is expected to Based on the 1997 estimates the Orange County job base is approximately 1.3 million. By the 1 - Population Growth/Distribution - 2020. occur in the South, yet the North will continue to have a higher concentration of jobs. See Table these numbers, the county job base distribution in year 2020 is projected to be 55% in the North year 2020 the job base is expected to grow to approximately 2.1 million (61% increase). Given


Table 1: Population Growth/Distribution - 2020

45%	55%	2.1*	42%	58%	1.3*	Employment
43%	57%	3.2*	42%	58%	2.7*	Population
south cour	north county	2020	south county	north county	1997	
% in	% in	Year	% in	% in	Year	

^{*}In Millions

the County Line. end of the route skirts in out of Los Angeles County and the Orange County portion terminates at Malvern Street with Beach Boulevard providing the main arterial linkage. The northernmost near Beach Boulevard. A multimodal Transportation Center will be located near the I-5 and accessed by SR-39. As the route progresses north to the City of Buena Park it is known as the north out of the coastal area, it serves as a major north-south high volume arterial with linkages "Entertainment Corridor" providing access to the many entertainment attractions located along or to 5 state routes. Most of the industrial/commercial development is directly adjacent to and is the route becomes a relatively high-density retail and commercial use area. As the route extends the City of Huntington Beach, the coastal areas, and resorts. Traveling north towards the I-405, the southern terminus of the route (near the intersection of SR-1) is known as "The Gateway" to Land use along SR-39 is predominantly retail/professional/business and commercial. The area at

ROUTE CONCEPT COUNTY NORTH/SOUTH SPLIT

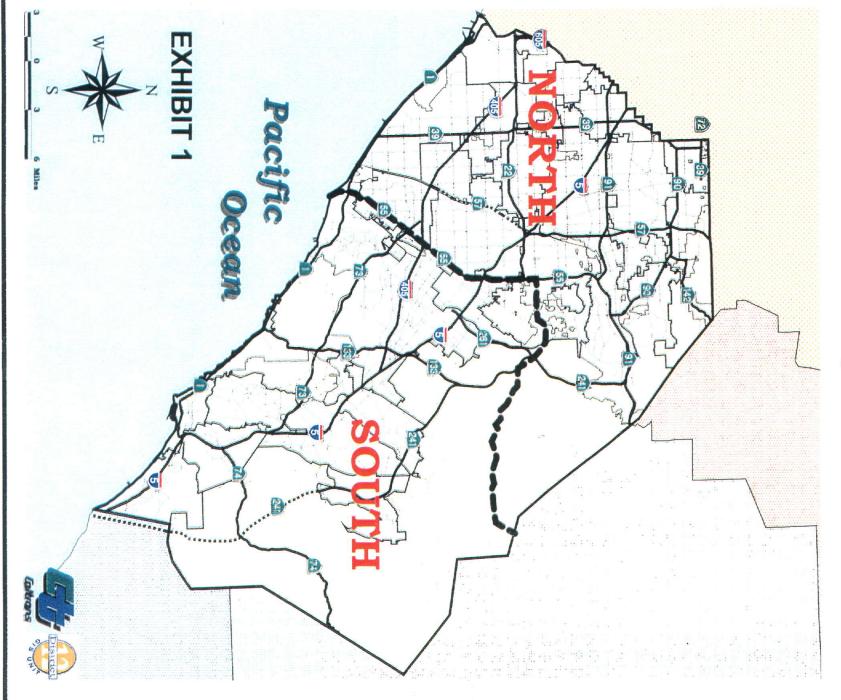

Military Operations: There are no military bases near the vicinity of SR-39.

MULTIMODAL TRANSPORTATION

Park and Ride Lots

complement the freeway system, and more importantly, to complement the HOV lane network. in concert to develop park and ride solutions in Orange County to encourage ridesharing, highway system, not just in Orange County, but throughout the region. Caltrans and OCTA work HOV lanes are currently existing, programmed or planned for each existing freeway in Orange The Park and Ride Program is an integral element of long term operational strategies for the state

located where churches, shopping centers or other businesses reserve a portion of their existing Table 2 - Park and Ride Facilities. These facilities are more directed toward ridesharing efforts directing motorists to their parking lot. parking lot for Park and Ride users. Often times the entity name will be placed on guide signs Center operated by OCTA and the other two are "shared use" facilities. Shared use facilities are for the I-405 Corridor, but may also be of benefit to SR-39. One of them is a Transportation Currently there are three park and ride facilities that serve both SR-39 and I-405 corridors.

TABLE 2
Park and Ride Facilities

	- 13
Names of Park & Ride Facilities	Location
Golden West Transportation Center in	Gothard St. @ Center Ave
the City of Huntington Beach	(near SR-39 & I-405 I/C)
United Methodist Center of Good	8152 McFadden Ave
Shepherd in the City of Westminster	(Permit is required)
King of Glory Lutheran Church	10280 Slater Ave
In the City of Fountain Valley	(Permit is required)

as of 6/00

development of park and ride facilities or other ridesharing activities. Since SR-39 does not have existing HOV lanes, it is not a high priority corridor for the

Bicycle Facilities

There are no bicycle facilities on SR-39.

Transit/Rail

on the corner Harbor Boulevard and Commonwealth Avenue. This station is on the Los Angeles SR-39 is the Fullerton Transportation Center located approximately 5 miles east of Buena Park There are no rail lines serving the SR-39 corridor. At the present time the closest train station to

Metrolink System Map on Page 10 and Exhibit 2a – Highway/Rail System on Page 10a. Buena Park in the future. This station will serve the same corridor. Refer to Exhibit 2 and Metrolink trains make stops at this station. Plans are being made to construct a station in to San Diego (LOSSAN) Rail Corridor, which primarily serves the I-5 Corridor. Both Amtrak

Mesa to Los Angeles County. conducted by the West Orange County Cities to study the potential for rail connecting Costa The Beach Boulevard corridor has been identified (among others) in a preliminary study

Transit/Bus


facilities along Beach Boulevard. Route 29 offers weekday, Saturday, and Sunday/Holiday service to civic centers, malls, entertainment and recreational attractions, and educational Street, connects with the Golden West Transportation Center (at the SR-39/I-405 junction), with Route 29 runs from Huntington Beach to Brea via Beach Boulevard. It begins at SR-1 and 1st The Orange County Transportation Authority (OCTA) provides public transit services on SR-39.


plans to add additional busses or service to this route. productivity, peak headway, and service span measures set by OCTA. Currently, there are no Saturday service. There are 27 connecting routes to OCTA Route 29. Route 29 meets a.m. (SR-1) and ends at 9:59 p.m. (Brea Mall) with the same (approximate) headways as with S/B headways of 1 hour and N/B every 1/2 hour. Sunday and Holiday service begins at 8:07 depending on time and day. Saturday service is from 6:15 a.m. (Brea Mall) to 9:12 p.m. (SR-1) of approximately ½ hour. The entire length of the route can take from 50 minutes to 2 hours On weekdays, buses run from approximately 5:00 a.m. to midnight with S/B and N/B headways

Project on most routes. all "Smart Bus" features by fall of 2000. The OCTA is implementing a Bus Restructuring schedules and even helps passengers catch a connecting bus. The OCTA expects to incorporate technology that precisely tracks location, improves on-time performance, creates accurate bus the country, the OCTA expects to equip all fixed route buses with state-of-the-art communication Smart Bus Technology: Bringing improvements to one of the fastest growing transit systems in

Transportation Centers

transportation alternatives via Metrolink and Amtrak Park Multimodal Transportation Center located at the I-5 near SR-39 will provide regional The Goldenwest Transportation Center is located at Beach Boulevard/I-405. The new Buena

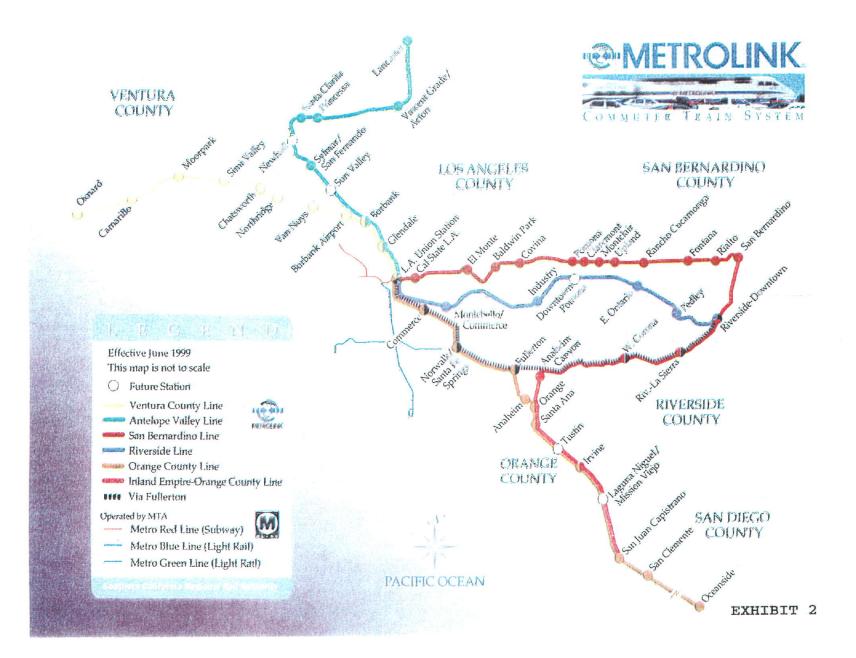

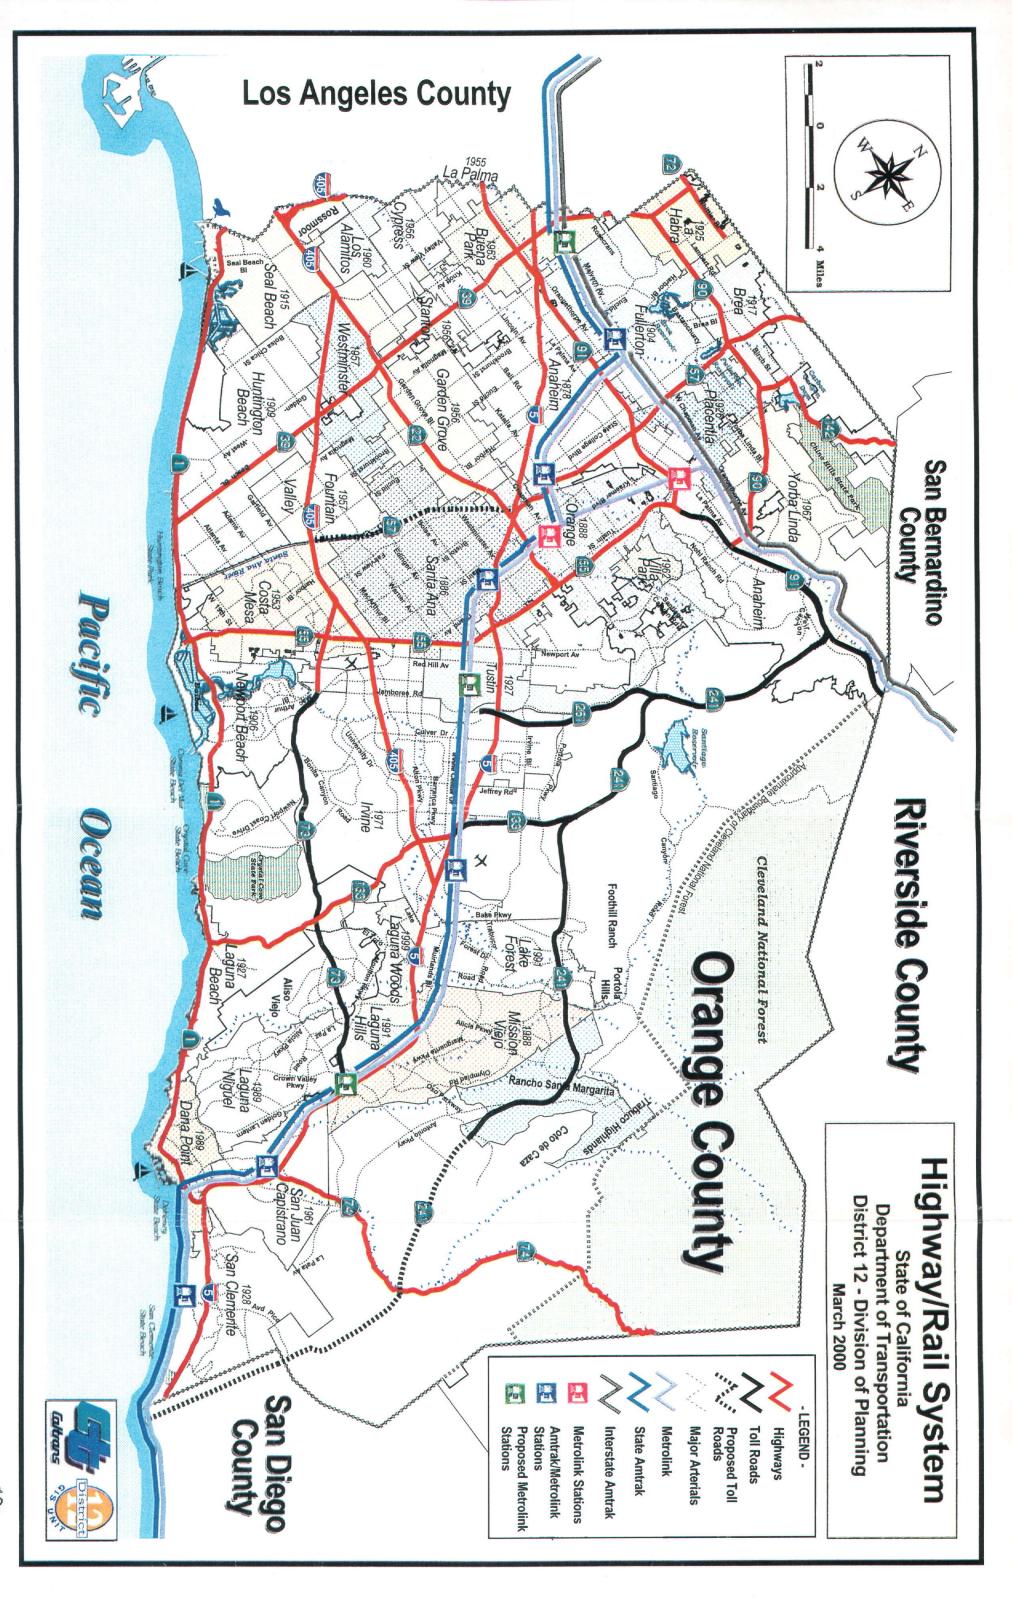

CURRENT ISSUES/PROBLEM IDENTIFICATION

that are identified below by RCR Segment Number (by approximation) and city that could have an impact on SR-39. These issues and projects were considered when developing the concept acceptable LOS along most of the route. There are some local projects and issues along SR-39 SmartStreet Project has had a significant impact in contributing to the attainment of an LOS for this route. operating at an LOS of "E" or better except for Segment 5 which is operating at "FO". Project was completed for Beach Boulevard in 1999 and all segments of the route are currently No major projects are planned at this time to ease congestion on this route. The SmartStreet

Segment 1 - City of Huntington Beach

south and north of the junction. There are plans for a revitalization project in this area (see also a proposal to add one lane in each direction for through-traffic at the junction of SR-39 and turn lane S/B). the SR-39/SR-1 junction. It is currently 3 lanes N/B and 1 lane + 2 right turn lanes and 1 left SR-39 as the "Gateway" to the ocean and has proposed widening SR-39 to 6 (through) lanes at SR-39 is a critical access route to SR-1 (Pacific Coast Highway) and the beach. The city refers to I-405. There are currently 3 lanes in each direction at the junction and 4 lanes in each direction The current LOS for this segment is "E". The concept LOS is "FO". There is

conference center development area. In addition, the city is in the process of redeveloping the when completed. Huntington Center Mall at I-405 and Beach Boulevard. It will be a major revitalization project Ocean Grand Hotel and Coast Resort at Pacific Coast Highway (SR-1), a major hotel/resort and Development: There are a number of development projects proposed in the City of Huntington Beach that could impact SR-39. Of particular importance, however, is the Waterfront Project –

commercial/residential/mixed-use development. There is a Class II Bikeway planned on SR-1 (PCH) and a 31-acre vacant site that is proposed for

Segment 2 - City of Westminster

9.5-acre site development at Westminster Memorial Park. The city is completing landscaping improvements along Beach Boulevard and there is a proposed

The City of Westminster is proposing to designate the entire City for redevelopment

405 and SR-22. Additionally, "pinch points" have been identified at the Beach Boulevard undercrossings of I-

Segment 3 - City of Garden Grove

except for a gas station/ commercial center development at the Southeast corner of Beach There are no major developments planned within the City of Garden Grove in reference to SR-39 Boulevard and Garden Grove Boulevard.

Segment 3 - City of Stanton

The city has completed a ¾ million-dollar landscape improvement project along the median of Beach Boulevard

Fern Street. The city will be modifying signals at that intersection. Caltrans will be relinquishing the section of Garden Grove Boulevard from Beach Boulevard to

center at Beach Boulevard and Stanford Avenue. Boulevard just south of Pacific Avenue, and 2) The Diversion Median in front of the shopping Two ongoing issues regarding SR-39 are: 1) The Union Pacific R/W signal project at Beach

on East Beach Boulevard near Cerritos and Katella Avenues will impact SR-39 drainages The storm drain and infrastructure improvements at the 160-acre commercial site located

The Stanton Redevelopment Project 2000 proposes redevelopment throughout the City.

Segments 3, 4 - City of Anaheim

and noise are proposing a cul-de-sac that would terminate at Beach Boulevard Rome Avenue and Beach Boulevard: Residents in this area concerned with high traffic volumes

and Lincoln is an 18-acre former landfill site and depending on toxic clean up costs has the and rezoning from residential to commercial land use. The Northeast corner of Beach Boulevard potential for redevelopment activities. West Anaheim: The area around Lincoln and Beach Boulevard is designated for redevelopment

and considering creation of an overlay zone. The Redevelopment Agency is studying alternative land use along the Beach Boulevard corridor

planning a rail-feeder system at the new rail station in Anaheim. The Anaheim Canyon Business Center Transportation Management Association (TMA) is

of benefit to SR-39. The City of Anaheim continues to implement its Major Street Beautification Program, which is

Segments 3,4 – City of Buena Park

junction that will ease congestion on SR-39. Freeway Improvement Project: There is a joint freeway improvement project at the I-5/SR-91

SmartStreet Program: One lane in each direction has been added to Beach Boulevard from Lincoln to SR-91 for a total of 8 lanes.

being installed at various locations along Beach Boulevard. Blvd and at Beach/La Mirada/and Malvern. In addition, the City has an Intersection Improvement Project at Orangethorpe/Artesia/Beach TCC, CCTV, HAR Communication Systems are

temporary traffic issues due to the Buena Park Mall Renovation Project. facility which proposes to include a new signal at the intersection of Beach Boulevard; and SR-39 are: the new Knott's Berry Farm Water Park on Beach Boulevard; the new City Hall Development: Future planned development projects in the City of Buena Park that may impact

commercial, business, and entertainment centers in the city. will help to ease congestion on SR-39 provided that connecting services are available to major Ride) will be provide (regional) alternate transportation opportunities for residents and others and The construction of the Buena Park Transportation Facility Metrolink Station (includes Park n'

Bridge crossing at the Brea Creek Channel. A Bridge Replacement Project is currently underway for replacement of the Beach Boulevard

Segments 4,5 - City of Fullerton

Hawks Pointe Development, a 55.5 acre, 210 single-family housing development is adjacent to at SR-39 and SR-90. Amerige Heights, a planned 293-acre residential and mixed-use development is located

Segments 5,6 - City of La Mirada

of Beach Boulevard/south of Hillsborough Drive called Hawks Pointe. The city is proposing a 122 single-family dwelling housing development located on the east side

Segments 6,7 - City of La Habra

development (695,000 commercial/sq.ft) at the intersection of Beach Boulevard and Imperial Highway. This is the site of the former Chevron Research Facility. There are plans to create a Planned Unit Development (PUD) for the La Habra Westridge Plaza

TRAFFIC ANALYSIS

Introduction

this route experiences heavy use 7 days per week. This route has been designated as a communities along SR-1. It is also a major commercial, retail, and business corridor. Museum, Mid Evil Times and Wild Bills. It also provides direct access to the beach SmartStreet with one lane added in each direction along with multi-left turn pockets at various has been named the entertainment corridor because it serves Knotts Berry Farm, Movieland Wax provides access to recreational opportunities along the route. In the City of Buena Park the route is a heavily used by commuters. On weekends the route serves a recreational corridor that link between the coastal communities and the northern communities. During the week this route Angeles County Line at Whittier Blvd. (SR-72) in the City of La Habra. It is an intra-regional SR-39 extends from the Pacific Ocean in the City of Huntington Beach to the Orange/Los Therefore

Management Center (TMC). It is also recommended to develop more transit service within the route in order to best manage the system as a whole, and via the state of the art Traffic recommended to fully implement ITS, TSM, and TDM traffic management elements on this LOS above the F level at all times. A certain degree of LOS F must be accepted. It is being Given the demands on this facility, it would be impossible to add enough capacity to improve the

Average Daily Traffic

stations and other information taken from previously completed environmental documents and project related studies. year forecast. Other sources of information used for existing volumes may include: count State Highways book and from the Los Angeles Regional Transportation Study (LARTS) base 2020 Concept. The existing data was collected from the 1997 Traffic Volumes on California this information: Existing, Year 2020 Null (projects under construction and funded) and Year The ADT Summary data for SR-39 is shown in Exhibit 1. There are three time frames given for

volumes and LOS are all products of the LARTS transportation model. Transportation Study (LARTS) model. The peak hour traffic volume, peak hour direction The future traffic data presented in this document is a product of the Los Angeles Regional

Transportation Modeling Description and Socioeconomic Summary

arterials, and transit service (including rail service). model are; population, employment and income. The transportation system includes highways, Among existing and projected socioeconomic variables used in the development of the LARTS transportation system. The LARTS model is a socioeconomic driven transportation model. The LARTS model simulates the interaction between socioeconomic factors and the

used in SCAG's RTP. Table 3 provides a summary of the socioeconomic variables for the year the SCAG Region. The data used for traffic forecasting analysis in this RCR is identical to that 2020 at the county and region level. Regional Transportation Plan (RTP) Community Link 21, the long-range transportation plan for Imperial) prepared the socioeconomic forecast for the 2020. In April 1998, SCAG completed the local county government (Los Angeles, Orange, Riverside, San Bernardino, Ventura and The Southern California Association of Governments (SCAG), in cooperation with state and

TABLE 3
Socio-Economic Data - Orange County/Region

Socio-Economic Data	Year 2020-Orange County	Year 2020-Region *
Population	3,206,020	20,632,271
Housing	1,094,024	7,151,115
Employment	2,101,316	10,028,476
*I A 1 O IV	*1 - 1 - 0 - 11 - 12 - 13 - 13 - 13 - 13 - 13 - 13	

^{*}Los Angeles, Orange, Ventura, and Metropolitan portions of Riverside and San Bernardino counties

Goods Movement - Truck Volumes

numbers as a percentage of AADT range from 3 to 6%. The highest volumes occur in the Page 16 for a comparison of this route to other routes in the region. percentages by route segment for SR-39. See Exhibit 3, Truck Percentages of AADT Map on vehicle AADT occur at the I-5 junction. Below is a breakdown of Truck Annual AADT vicinity of the SR-91 and I-405 junctions. The highest truck percentages (6%) as a total of Highway System, daily truck volumes on SR-39 range from about 500 to over 2,900. These According to the publication 1997 Annual Average Daily Truck Traffic on the California State


Truck Annual AADT Percentages by Route Segment

TABLE 4

4	_	7
,	(,
6% 59	% 3%	3%
- 1		2
		20.72 -
15.07 19.17	20.72	22.60
SR91/1-5 I-5/S	R90 SR90/	SR72/Co.
		Line
Postmile 3% 3% 5% 6% Limits SR1/1-405 1-405/SR22 SR22/SR91 SR91/1-	5% 59 38 - 15.0 37 19.1 31/1-5 1-5/S	5% 3% 15.07 - 19.17 - 19.17 20.72 5 I-5/SR90 SR90/ SR72

Traffic Systems Management

to the TOS Plan and its system elements. (On State Highway - Conventional Routes such as SRsystem elements outlined in it. See Appendix 5 - Urban Freeway Standards for an introduction Standards. Integral to this development is the Traffic Operation Systems (TOS) Plan and the motorist information to achieve the maximum operating efficiency of the transportation system. 39, SmartStreet strategies are implemented instead of TOS.) In particular, Caltrans' goal is to develop all freeways in Orange County to full Urban Freeway without adding capacity. The theory is to implement operational improvements and disseminate Traffic Systems Management is a strategy for improving mobility on the transportation system

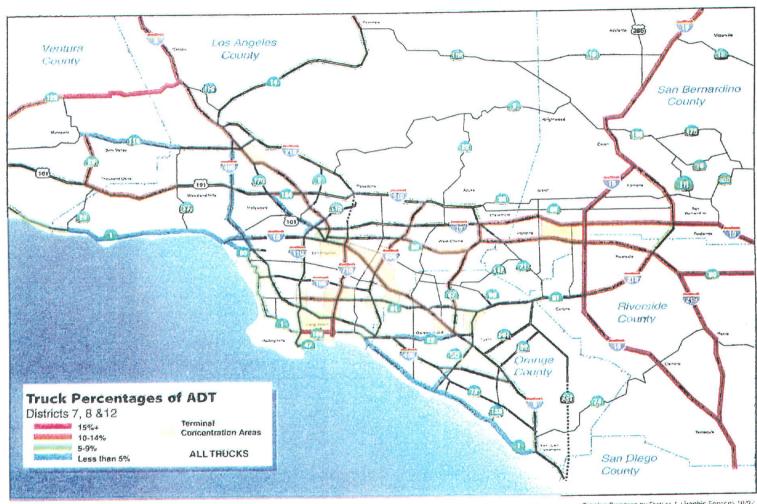

Graphic Preparen by Exstent 7: Graphic Sendons 10/97 Orange County Freeways Reinsed 11/95



Accident Rates - Automobiles

being measured. See Table5 below for Table B information on SR-39. accident rates can be greatly influenced by the length of the segment as well as the time period described in this report are not necessarily indicators that there is a significant problem since comparison to the accident rate averages on similar routes statewide. Higher than average rates purposes. The data is an indicator of the accident rate of a particular segment of a route in Surveillance and Analysis System (TASAS). This information is used for general planning The accident rate information shown in this report is taken from Table B of the Traffic Accident

requiring investigation. On SR-39, the intersections at Katella Avenue and Lincoln Avenue had developing recommended solutions. One tool used in this process is the Table C report that lists the highest number of accidents during the 36-month period from 10/1/96 to 9/30/99. high accident concentration locations and uses an automated system for flagging locations ensure Caltrans has statewide consistency in identifying safety problem locations and for The Accident Surveillance Procedures Manual developed by the Division of Traffic is used to

cost project, or through the District Minor Program whichever meets the funding criteria. For as possible in either the State Highway Operation and Protection Program (SHOPP) if it is a high continuous process. After a safety project is identified it is prioritized and programmed as soon more detailed information please refer to the Accident Surveillance Procedures Manual. Highway safety is Caltrans' highest priority. Identification of safety problem areas is a

Accident Rate exceeds the Average Rate in Segments 1, 3 4 and 6. The chart below shows that between October 1, 1996 to September 30, 1999, the Actual Total

Table 5
Accident Rates from TASAS*
(Table B)

SR-39

10/1	/96 through 9/30/99	30/99		ACTUAL			AVERAGE	
			FATAL	FATAL &	TOTAL	FATAL	FATAL &	TOTAL
				INJURIES			INJURIES	-
-		SR-1/I-405	.014	1.58	4.45	.012	1.09	2.40
2		I-405/SR-22	.013	1.27	1.68	.012	1.10	2.41
w		SR-22/SR-91	.026	1.49	3.57	.012	1.10	2.41
4		SR-91/I-5	.000	1.67	3.38	.012	1.09	2.40
5		I-5/SR-90	.005	.81	1.73	.018	1.02	2.23
6	19.1/20.7	SR-90/SR-72	.041	1.15	2.59	.017	1.08	2.40
7		SR-72/County Line	.000	.44	1.05	.014	1.54	3.60

^{*}per million vehicle miles of travel

PROGRAMMED PROJECTS

soundwalls, landscaping, paving or minor projects. cost. Projects are programmed into one of the following State highway programs: State locally funded and administered projects, noted as LOCAL. Plan (SHOPP), and the Regional Transportation Plan (RTP). Programmed projects also include Transportation Improvement Program (STIP), the Highway System Operations and Protection (FY 96/97) or later. For this report a programmed project is defined as having a schedule and Table 6 lists the major projects programmed for construction beginning in State Fiscal Year 96 This listing does not include

TABLE 6
Programmed Projects
DESCRIPTION CODE EST

There are no major construction projects programmed for SR-39

more information. See CURRENT ISSUES/PROBLEM IDENTIFICATION section for other (local) projects and

Legend
PPNO = Planning and Program Number
PM = Postmile
FY ADV = Proposed Fiscal Year of Advertising

ROUTE CONCEPT

Introduction

on ridership and funding. No one solution exists for the transportation challenges facing the SRthe very preliminary planning stages and has not yet been determined to be feasible in the SR-39 congestion problems should continue to be implemented and expanded. Rail service is only in Given projected increases in traffic demand and limited funding, multimodal solutions to Bus transit service is currently in operation on SR-39; expanded service will depend

bus turnouts, bicycle facilities, and improved/increased transit services. See APPENDIX 4 and Services, Advanced Traffic Management Systems) and TSM/TDM strategies such as restriping, etc., with tie-in to TMC) is strongly recommended as a means of managing the State Highway See APPENDIX 7 for examples of Mitigation Measures (ITS, TSM and TDM). APPENDIX 5 for more detailed information on New Technology and Urban Freeway Standards use of ITS techniques (Ramp Meter/Arterial Adaptive Control, Advanced Traveler Information System in the urban areas of California. On Route 39, traffic flow can be improved through the The full implementation of Traffic Operation System elements (CCTV, ramp metering, CMS,

Regional Consistency

the RME; therefore, this concept is consistent with regional planning efforts. meet this route concept. All major projects programmed in the RTIP for SR-39 are contained in funding source identified. The major projects already programmed or planned for this route will Improvement Program (RTIP) must be contained in the regional transportation plan and have a Southern California Region. By law, all projects programmed in the Regional Transportation Element (RME). The RME is the long-range regional transportation plan for the six county The route concept called for in this report is consistent with SCAG's 1998 Regional Mobility

Caltrans and OCTA are in full agreement on the following concept outlined for SR-39

Segment 1 PM 0.0/5.8 (From SR-1 to I-405)

Existing Facility: Conventional 6-8 Lanes LOS E

Concept: Conventional 6-8 Lanes LOS FO

and 1 right-turn lane(s) S/B. From Talbert to I-405 this segment is 8 lanes, 4 in each direction. The first part of this segment currently operates as 3 through lanes N/B and 1 lane plus 2 left-turn See CURRENT ISSUES.

Segment 2 PM 5.8/8.4 (From I-405 to SR-22)
Existing Facility: Conventional 8 Lanes LOS C

Concept: Conventional 8 Lanes

This segment currently operates as 8 through lanes, 4 in each direction. See CURRENT ISSUES

LOS E

Segment 3 PM 8.4/14.3 (From SR-22 to SR-91)

Existing Facility: Conventional 8 Lanes LOS C

Concept: Conventional 8 Lanes LOS F1

This segment currently operates as 8 through lanes, 4 in each direction. See CURRENT ISSUES.

Segment 4 14.3/15.7 PM (From SR-91 to I-5)

Existing Facility: Conventional 6 Lanes LOS D

Concept: Conventional 6 Lanes LOS F2

This segment currently operates as 6 through lanes, 3 in each direction. See CURRENT ISSUES

Segment 5 PM 15.7/19.1 (From I-5 to SR-90)

Existing Facility: Conventional 6 Lanes LOS FO

Concept: Conventional 6 Lanes LOS F1

This segment currently operates as 6 through lanes, 3 in each direction. See CURRENT ISSUES

Segment 6 PM 19.1/20.7 (From SR-90 to SR-72)

Existing Facility: Conventional 6 Lanes LOS C

Concept: Conventional 6 Lanes LOS E

This segment currently operates as 6 through lanes, 3 in each direction. See CURRENT ISSUES

Segment 7 PM 20.7/23.1 (From SR-72 to the County Line)

Existing Facility: Conventional 4 Lanes LOS C

Concept: Conventional 4 Lanes

LOS C

This segment currently operates as 4 through lanes, 2 in each direction. See CURRENT ISSUES

Table 7 - Level of Service Comparison

	20.88	20.72	19.67	19.17	01/.3	0.33	16.30	15.57	15.07	14 58	1/1 3/8	12.07	10 60	11.68	11.18	10.66	9.67	8.48	7.63	6.64	0,00	л т О С	4	4.13	3.61	3.12	1.63	0.00	Post Mile	
Horor Rod	Hacienda Blvd	SR-72 Whittier Blvd	Lambert Rd	SR-90 Imperial Hwy	D17.34 ROSECTORS AVE	במיאווימממ טיאמ		Artesia Riva	-55	Orangethorne Ave	\$5-01 50-01		lippoin Ave	Ball Rd	Cerritos Ave	Katella Ave	Chapman Ave	SR-22	Westminster Ave	Bolsa Ave	7-400	LAOS GOVE	Morpor Avo	Slater Ave	Talbert Ave	Main St/Ellis Ave	Adams Ave	PCH (SR-1)	Description of Location	
c	C	æ	י כ	œ	က က	C	C	C	O	C	O	C	O	C	В	σ)	ဂ	C	0	0	0	0		7	m	O	LOS A.M. (NB)	
O	D	C) (C	C	т	D	C	C	C	C	C	O	0	0	C	• ()	C	C	C	C	С	C	ο α	,	C	σ	P.M.	1997
C	C	C) (ဂ	C	FO	O	œ	C	C	₿	œ	œ	8	œ	α	0	,	œ	₿	O	œ	C	æ) >	>	D	>	LOS A.M. (SB)	97
C	D	α	י כ	œ	ဂ	D	C	O	C	D	C	C	C	C	C	C) ()	റ	റ	O	O	O) ()	m	0	LOS P.M. (SB)	
₩	В	α	ָ כ	Þ	В	₿	œ	т	m	F0	m	FO	FO	В	₿	α	П	П	æ	œ	œ	В	œ	п	ια	9	FO	ш	A.M.	
₿	В	п	7 (œ	m	FO	IJ	FO	F2	FO	Fo	IJ	FO	т	FO	п	ı n	n ,	FO	FO	œ	₿	₩.	00	σ	0	œ	ω	P.M.	2020 Null
Ф	₿	п	n (œ	m	ī	ᄁ	FO	F1	FO	F ₀	FO	m	В	т	α	0	ס	æ	œ	œ	В	œ	σ) >	>	œ	œ	LOS A.M. (SB)	Nu
æ	œ	α	י ס	œ	₽	₿	FO	FO	FI	FO	F ₀	끄	FO	т	m	α	. 5	3	FO	FO	œ	В	8	П	ια	0	т	J	LOS P.M. (SB)	
O	D	α	0 (Œ	C	œ	D	m	FO	FO	m	FO	m	D	0	C) П	n	O	D	C	0	D	7	ב פ	3	FO	FIO	A.M.	
C	D	п	n (O	m	FO	Ŧ	FO	F2	FO	FO	F1	FO	m	FO	П	1 1	n	m	O	O	D	D		0 0)	0	0	P.M.	2020 Concept
C	C	П	n I	D	m	FO	Ţ	FO	IJ	FO	FO	FO	т	D	m	C	, ,	כ י	O	O	0	С	C	α	, p	>	Œ	Œ	LOS A.M. (SB)	oncept
0	0	יי	7	റ	O	0	FO	FO	Ţ	FO	P	끄	FO	m	m	C	5 2	<u>n</u>	m	0	Ö	0	D	Ģ] п	1	F	IJ	LOS P.M. (SB)	

TABLE 8

					EXI	EXISTING		
					PK HR PK DIR VOL		PK HR PK DIR LOS	DIR LOS
			ADT	# OF				
SEG	PM	LIMITS		LANES	NB	SB	NB	SB
1	0.0/5.8	SR-1/I-405	60,000	6-8	2,990	2,800	H	D
2	5.8/8.4	I-405/SR-22	59,000	8	2,480	2,430	С	С
3	8.4/14.3	SR-22/SR-91	52,000	8	2,290	2,490	С	С
4	14.3/15.0	SR-91/I-5	55,000	6	1,990	2,220	С	D
5	15.0/19.1	15.0/19.1 I-5/SR-90	52,000	6	2,650	2,790	E	FO
6	19.2/20.7	19.2/20.7 SR-90/SR-72	31,000	6	1,740	1,550	С	С
7	20.7/23.1	20.7/23.1 SR-72/Hacienda Blvd.	29,000	4	1,090	1,130	С	С

					2020	2020 NULL		
			3)	PK HR PK DIR VOL		PK HR PK DIR LOS	DIR LOS
SEG	PM	LIMITS	707	LANES	NB	SB	NB	SB
_	0.0/5.8	SR-1/I-405	75,700	6-8	3,480	3,410	FO	FO
2	5.8/8.4	I-405/SR-22	84,600	8	3,960	3,970	FO	FO
w	8.4/14.3	SR-22/SR-91	105,000	8	4,650	4,720	F1	F1
4	14.3/15.0	14.3/15.0 SR-91/I-5	88,500	6	3,850	3,570	F2	F1
5	15.0/19.1	15.0/19.1 I-5/SR-90	85,100	6	3,520	3,600	F1	F1
6	19.1/20.7	SR-90/SR-72	44,400	6	2,690	2,710	E.	Е
7	20.7/23.1	20.7/23.1 SR-72/Hacienda Blvd.	32,800	4	1,130	1,210	В	В

					2020 C	2020 CONCEPT		
			ADT	# OF	PK HR PK	PK HR PK DIR VOL	PK HR PK DIR LOS	DIR LOS
SEG	PM	LIMITS		LANES	NB	SB	NB	SB
 ,	0.0/5.8	SR-1/I-405	75,300	6-8	3,950	3,770	FO	FO
 2	5.8/8.4	I-405/SR-22	77,300	8	3,440	3,580	H	H
 3	8.4/14.3	SR-22/SR-91	104,500	8	4,620	4,700	F1	F1
4	14.3/15.0	14.3/15.0 SR-91/I-5	88,300	6	3,730	3,480	F2	F1
5	15.0/19.1	I-5/SR-90	84,500	6	3,470	3,580	F1	F1
6	19.2/20.7	SR-90/SR-72	43,900	6	2,590	2,630	H	E
7	20.7/23.1	20.7/23.1 SR-72/Hacienda Blvd.	32,800	4	1,120	1,200	С	С
		1						

APPENDICES

APPENDIX 1

Graphic Representation and Definition of Levels of Service (LOS)

projects were identified which neither had funding nor implementation schedules. proposed to be included as an element of larger projects (widening/reconstruction, adding HOV implementation schedules. Because of potential cost savings several other projects were Several TOS elements were identified as individual projects with identified funding and importantly the updated version looked closer at actual implementation plans and schedules Plan refined definitions and uses of the various technologies outlined in the original report. More lanes, etc.); however in many of these cases no funding was identified. Finally, several new The TOS Plan was updated by Traffic Operations in January 1994. This iteration of the TOS


engineering costs. implement these items as part of larger projects in order to save on project development and route in Orange County up to urban freeway standards. It may be most cost effective to route concepts in Orange County. It is the goal of Caltrans District 12 to bring each freeway Full implementation of the TOS Plan elements is an integral part of this and all other freeway

New Technology

efforts currently underway in Orange County. STANDARDS section other New Technology programs are currently being implemented in as "new technology". It would also be appropriate to consider most of these elements as Traffic TECHNOLOGY for a brief outline of new technology programs and some implementation Orange County, both on and off the State Highway System. Please see Appendix 4 - NEW between them. In addition to the TOS elements mentioned above in the URBAN FREEWAY advantage of new technology and these categories have a good deal of crossover application System Management (TSM) elements. Most of the above mentioned TOS elements take full There are several elements of the existing and future transportation system which are referred to

SmartStreet strategies can include technologies and elements utilized for TSM, TOS, and ITS

APPENDIX 1 Graphic Representation and Definition of Level Of Service

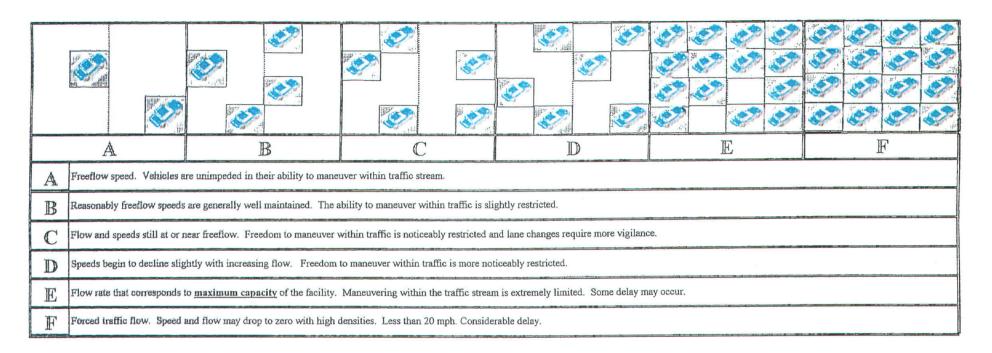

To reflect the duration of congestion (stop & go, speeds less than 20 mph), the LOS has been expanded to F0, F1, F2, and F3.

FO	0-1 Hour of congestion.
F1	1-2 Hours of congestion.
F2	2-3 Hours of congestion.
F3	More than 3 Hours of congestion.

TOPS LOS

Duration of LOS E (maximum flow rate, speeds 40 mph)

EO	0-1 Hour.
E1	1-2 Hours.
E2	2-3 Hours.
E3	More than 3 Hours.

APPENDIX 2

Segment Summary Pages

Route 39 Year 1997


	-	20 72	19.67	19.17	017.34	16.38	15.57	15.07	14.58	14.38	13.76	12.69	11.68	11.18	10.66	9.67	8.48	7.63	6.64	5.80	4.63	4.13	3.61	3.12	1.63	0.00	Post Mile
riacienda Bivo		SR-72 Whittier Blvd	Lambert Rd	SR-90 Imperial Hwy		La Mirada Blvd	Artesia Blvd	<u>-</u> 5	Orangethorpe Ave	SR-91	La Palma Ave	Lincoln Ave	Ball Rd	Cerritos Ave	Katella Ave	Chapman Ave	SR-22	Westminster Ave	Bolsa Ave	1-405	Warner Ave	Slater Ave	Talbert Ave	Main St/Ellis Ave	Adams Ave	PCH (SR-1)	Decription of Location
N	3	ω	ယ	ω	ω	ယ	ω	ا ع	ω	4	4	4	4	4	4	4	4	4	4	4	4	4	4	3	ယ	SOPHISHALES GENERALISM	No.
29,000	3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	31,000	31,000	43,000	50,000	52,000	42,000	41,000	55,000	52,000	47,000	46,000	45,000	44,000	46,000	51,000	49,000	51,000	59,000	57,000	60,000	59,000	50,000	37,600	29,000	-	2-way
1,030)	1,030	1,150	1,490	1,610	1,750	1,490	1,550	1,990	2,000	2,290	2,230	1,930	1,720	1,740	2,310	1,980	2,130	2,200	2,410	2,450	2,950	2,990	2,520	2,080	anno de la companya d	(1) 1 hr A.M Peak F
1,090		1,740	1,450	2,030	2,650	2,170	1,590	1,700	1,970	1,930	1,990	2,040	2,040	2,120	2,090	2,210	2,140	2,130	2,480	2,310	2,470	2,220	1,850	1,610	1,340		(2) 1 hr P.M Peak /
970		1,550	1,490	2,020	2,790	2,150	1,410	1,520	1,730	1,650	1,460	1,500	1,730	1,870	1,850	1,790	1,860	1,910	2,040	1,860	1,990	1,380	1,070	630	500	nosalestatuesed secueses	(3) 1 hr A.M Peak F
1,130	4	1,410	1,260	1,740	2,180	2,030	1,610	1,690	2,220	2,080	2,400	2,390	2,110	2,080	2,100	2,490	2,360	2,310	2,430	2,550	2,560	2,800	2,710	2,520	2,130	2	(4) 1 hr P.M Peak /
0.57	3	0.38	0.43	0.55	0.60	0.65	0.55	0.57	0.74	0.56	0.64	0.62	0.54	0.48	0.48	0.64	0.55	0.59	0.61	0.67	0.68	0.82	0.83	0.93	0.77	Colomor Landon Constitution	(1) V/C A.M Pea P
0.61	1	0.64	0.54	0.75	0.98	0.80	0.59	0.63	0.73	0.54	0.55	0.57	0.57	0.59	0.58	0.61	0.59	0.59	0.69	0.64	0.69	0.62	0.51	0.60	0.50		(2) V/C M Peak
0.54		0.57	0.55	0.75	1.03	0.80	0.52	0.56	0.64	0.46	0.41	0.42	0.48	0.52	0.51	0.50	0.52	0.53	0.57	0.52	0.55	0.38	0.30	0.23	0.19	100)	(3) V/C A.M Pea F
0.63		0.52	0.47	0.64	0.81	0.75	0.60	0.63	0.82	0.58	0.67	0.66	0.59	0.58	0.58	0.69,	0.66	0.64	0.68	0.71	0.71	0.78	0.75	0.93	0.79	100	(4) V/C O.M Peak
0	2	88	w	C	C	ဂ	C	C	Ç	C	C	O	C	₩.	œ	0	C	C	O	C	C	0	U	П	0		(1) LOS A.M Peak
0		0	C	0	m	O	C	C	O	C	C	C	C	0	C	C	C	0	0	C	0	0	В	0	В	articles and a second	(2) (3) (4) (1) (2) (3) (4) V/C V/C V/C LOS LOS LOS LOS P.M. Peak A.M. Peak P.M. Pea
O,	CONTRACTOR SECURITION	C	0,	0	FO.	D	æ	C	C	В	В	В	В	B	æ	В	8	æ	0	В	C	В	Α	A	Þ	accordations of the last	(3) LOS A.M Peak
0	with comments of the	₩.	B	0	D	C	C	C	0	C	0	0	C	C	O	C	C	C	C	0	O	0	0	m (0	Hottopowopuntengan	(4) LOS .M Peal

Route 39





Year 2020 Level of Service (NULL) Route Concept Report

Morning Peak

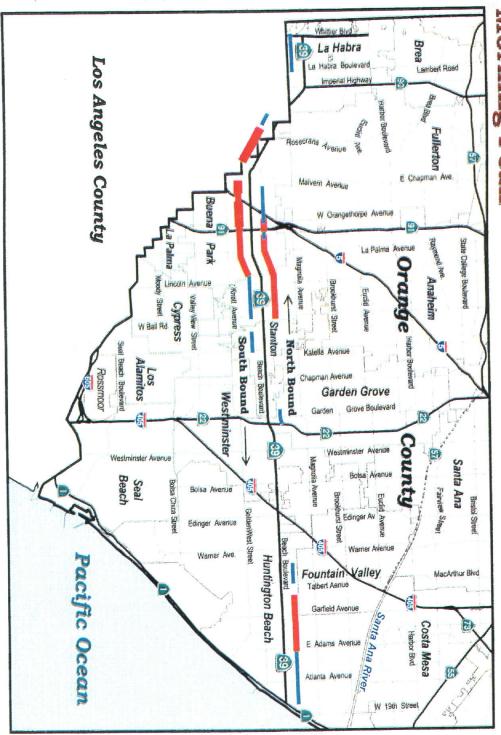

Afternoon Peak

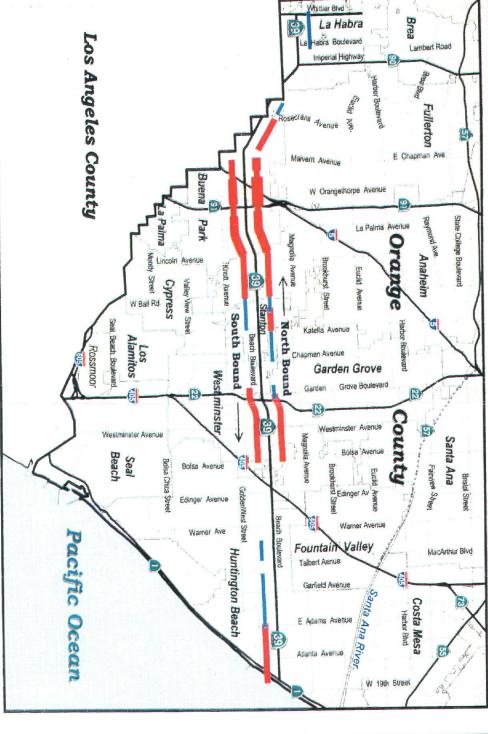






07/14/2000


Route 39


Route Concept Report
Year 1997 Level of Service (LOS)

Morning Peak

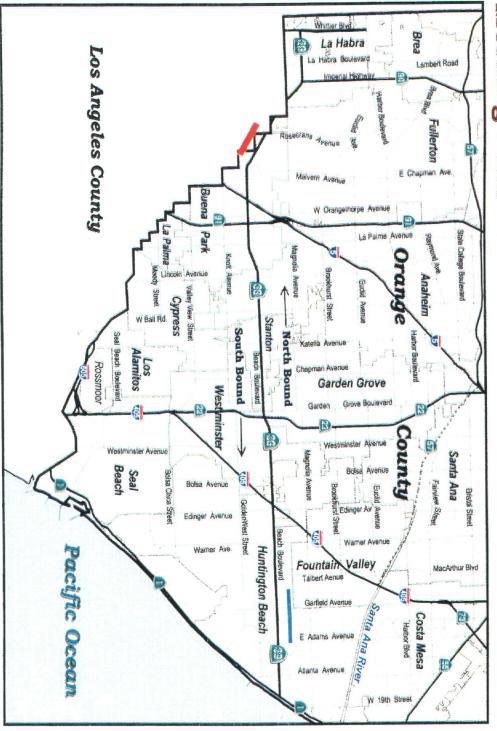

Afternoon Peak

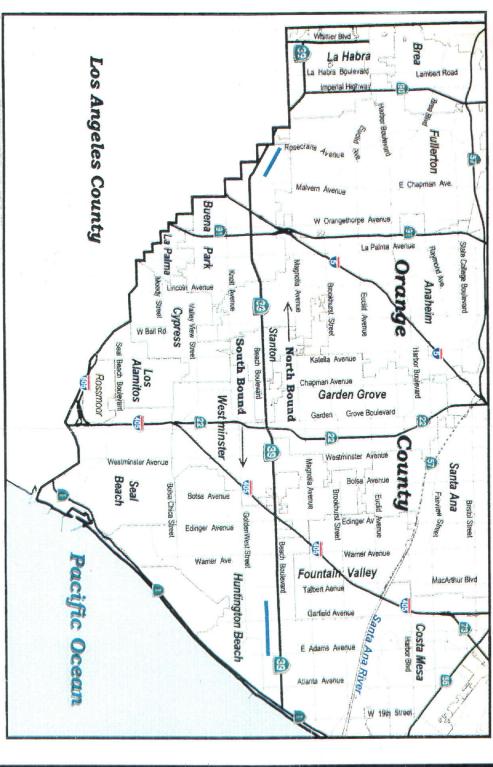






Route 39 2020 CONCEPT

2020	20ZU CONCEPT														
Post		No.		(1) 1 hr A.M Peak F	(2) 1 hr P.M Peak 1	(3) 1 hr A.M Peak F	(4) 1 hr P.M Peak /	(1) V/C	(2) V/C	(3) V/C	(4) V/C	(1) LOS	(2) (3) (4) LOS LOS LOS	(3) LOS	(4) Los
0.00	PCH (SR-1)	Lanes	ADT*	(NB)	(NB)*	(SB).		(NB)* (NB)* (SB)* (SB)* (NB)*	(NB)*	(SB)*	(SB)*	(NB)*	(NB)* (SB)*	(SB)*	(SB)*
1.63	Adams Ave	ω	45,800	2,830	1,990	1,000	2,960	1.05	0.74	0.37	1.10	FO	0	В	FO
3	Main St/Ellis Avo	ယ	45,600	3,000	1,980	1,030	2,990	1.11	0.73	0.38	1.11	FO	O	8	FO
3.61	Talbert Ave	4	63,100	3,860	2,490	1,240	3,580	1.07	0.69	0.34	0.99	FO	C	A	m l
4.13	Slater Ave	4	75,300	3,950	2,950	1,800	3,770	1.10	0.82	0.50	1.05	FO	0	₩	FO
4.63	Warner Ave	4	73,200	2,920	3,050	2,350	3,180	0.81	0.85	0.65	0.88	D	0	C	0
5.80	1-405	4	71,100	2,720	3,020	2,410	3,090	0.76	0.84	0.67	0.86	C	0	C	0
6.64	Bolsa Ave	4	76,400	2,530	3,020	2,450	2,900	0.70	0.84	0.68	0.81	C	0	C	0
7.63	Westminster Ave	4	74,900	2,850	3,170	2,730	3,310	0.79	0.88	0.76	0.92	D	D	C	0
8.48	SR-22	4	77,300	2,780	3,440	2,950	3,560	0.77	0.96	0.82	0.99	0	Е	0	Ш
9.67	Chapman Ave	4	81,300	3,340	3,460	2,900	3,790	0.93	0.96	0.81	1.05	ш	т	0	FO
10.66		4	75,100	2,640	3,340	3,020	3,300	0.73	0.93	0.84	0.92	C	m	0	O
11.18	Cerritos Ave	4	77,100	2,650	3,810	3,470	3,490	0.74	1.06	0.96	0.97	C	FO	т	т
11.68	Ball Rd	4	77,200	2,880	3,530	3,140	3,410	0.80	0.98	0.87	0.95	D	ш	0	m
12.69	Lincoln Ave	4	86,500	3,530	4,020	3,370	4,080	0.98	1.12	0.94	1.13	т	FO	m	FO
13.76	La Palma Ave	4	97,600	4,120	4,620	3,750	4,700	1.14	1.28	1.04	1.31	FO	Ŧ1	FO	F1
14.38	SR-91	4	104,500	3,600	4,450	4,020	4,270	1.00	1.24	1.12	1.19	Ш	FO	FO	FO
14.58	Orangethorpe Ave	ω	88,300	3,040	3,190	2,860	3,360	1.13	1.18	1.06	1.24	F0	Fo	FO	FO
15.07 -5	- 5	3	82,400	2,720	3,730	3,440	3,480	1.01	1.38	1.27	1.29	FO	F2	F1	F1
15.57	Artesia Blvd	ω	84,500	2,600	3,280	3,020	3,160	0.96	1.21	1.12	1.17	m	FO	FO	FO
	La Mirada Blvd	ω	82,500	2,200	3,470	3,580	3,010	0.81	1.29	1.33	1.11	D	F ₁	7	FO
17.34	17.34 Rosecrans Ave	ω	56,900	1,370	2,960	3,260	2,150	0.51	1.10	1.21	0.80	₿	FO	FO	0
19.17	SR-90 Imperial Hwy	3	53,700	1,490	2,570	2,610	1,980	0.55	0.95	0.97	0.73	C	ш	m	C
19.67	Lambert Rd	ω	43,900	1,160	2,170	2,190	1,720	0.43	0.80	0.81	0.64	В	0	D	C
20.72	SR-72 Whittier Blvd	3	43,800	1,070	2,590	2,630	1,820	0.40	0.96	0.97	0.67	8	т	m	0
20.88	Hacienda Blvd))) ;	1		t t t	;	1 1	;	1	3 4 7)			
22.60	22.60 Harbor Blvd	2	32,800	1,100	1,120	1,010	1,200	0.61	0.62	0.56	0.67	C	C	C	0


Route 39


Route Concept Report
Year 2020 Level of Service (CONCEPT)


Morning Peak

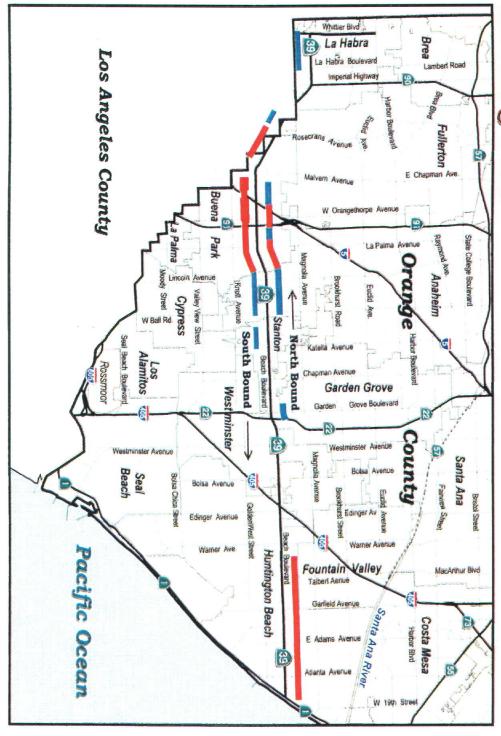

Afternoon Peak

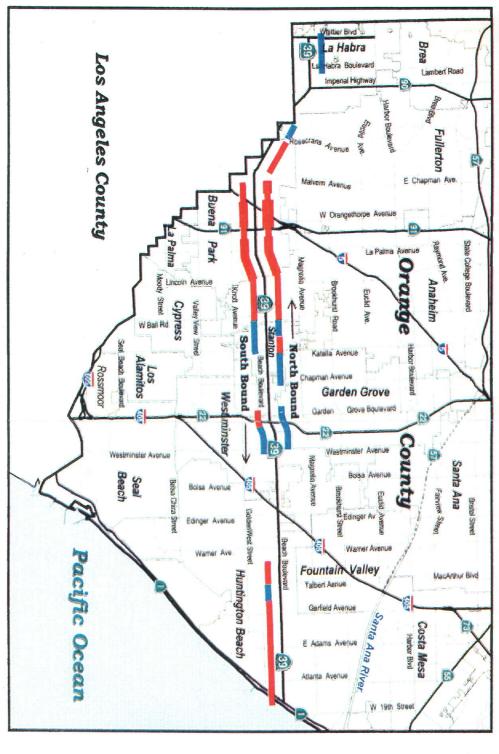





Route 39 2020 NULL

22.60 Har	20.88 Had	20.72 SR-	19.67 Lan	19.17 SR	017.34 Ros	16.38 La	15.57 Art	15.07 1-5	14.58 Or	14.38 SR-91	13.76 La	12.69 Lin	11.68 Ba	11.18 Ce	10.66 Ka	9.67 CH	8.48 SF	7.63 W	6.64 Bo	5.80 1-4	4.63 W	4.13 SI	3.61 Ta	3.12 M	1.63 A	1	2020 NULL Post Mile De
Harbor Blvd	Hacienda Bivd	SR-72 Whittier Blvd	Lambert Rd	SR-90 Imperial Hwy	Rosecrans Ave	La Mirada Blvd	Artesia Blvd		Orangethorpe Ave	-91	La Palma Ave	Lincoln Ave	Ball Rd	Cerritos Ave	Katella Ave	Chapman Ave	SR-22	Westminster Ave	Bolsa Ave	1-405	Warner Ave	Slater Ave	Talbert Ave	Main St/Ellis Ave	Adams Ave	PCH (SR-1)	ILL Decription of Location
N		, ω	ω	ω	ω	ω	ω	ω	ω	4	4	4	4	4	. 4	4	4	4	4	4	4	4	4	, ω	ω	Laires	No.
32,800		44,400	44,400	54,100	57,900	84,000	85,100	84,100	88,500	105,000	98,700	88,100	78,100	78,000	75,700	81,800	84,600	83,800	78,700	75,700	76,400	70,500	50,000	44,500	43,500	NO.	2-way
1,110		1,070	830	1,470	1,400	2,200	2,640	2,710	3,030	3,610	4,170	3,630	2,940	2,720	2,640	3,380	3,070	3,120	2,640	2,900	2,970	3,480	2,920	2,980	2,700	(ND)	(1) 1 hr AM Peak
1,130		2,690	2,210	2,610	3,050	3,520	3,290	3,850	3,290	4,470	4,650	4,120	3,550	3,840	3,370	3,510	3,960	3,700	3,120	3,140	3,110	2,730	1,800	1,980	1,990	(NB)-	(1) (2) 1 hr 1 hr AM Peak P.M Peak
970		2,710	2,280	2,610	3,410	3,600	3,080	3,440	2,950	3,990	3,780	3,420	3,130	3,500	3,040	2,980	3,320	3,190	2,570	2,550	2,520	1,730	1,040	1,060	990	(SB)*	(3) 1 hr A.M.Peak
1,210		1,800	1,730	1,970	2,250	3,040	3,160	3,570	3,290	4,340	4,720	4,140	3,380	3,490	3,300	3,770	3,970	3,750	3,040	3,230	3,240	3,410	2,640	2,700	2,730	(SB)	(4) 1 hr P.M Peak
0.62		0.40	0.31	0.54	0.52	0.81	0.98	1.00	1.12	1.00	1.16	1.01	0.82	0.76	0.73	0.94	0.85	0.87	0.73	0.81	0.83	0.97	0.81	1.10	1.00	(NB)*	
0.63		1.00	0.82	0.97	1.13	1.30	1.22	1.43	1.22	1.24	1.29	1.14	0.99	1.07	0.94	0.98	1.10	1.03	0.87	0.87	0.86	0.76	0.50	0.73	0.74	(NB)	(1) (2) (3) (4) (1) (2) (3) (4) V/C V/C V/C V/C LOS LOS LOS LOS A.M Pea P.M Peak A.M Peak A.M Peak P.M Peak A.M Peak P.M Peak A.M Peak P.M Peak A.M Peak P.M
0.54		1.00	0.84	0.97	1.26	1.33	1.14	1.27	1.09	1.11	1.05	0.95	0.87	0.97	0.84	0.83	0.92	0.89	0.71	0.71	0.70	0.48	0.29	0.39	0.37	(SB)*	(3) V/C A.M Pea
0.67		0.67	0.64	0.73	0.83	1.13	1.17	1.32	1.22	1.21	1.31	1.15	0.94	0.97	0.92	1.05	1.10	1.04	0.84	0.90	0.90	0.95	0.73	1.00	1.01	(SB)*	(4) V/C P.M Peak
8		В	A	B	8	B	ш	H	FO	т	FO	FO	₩.	œ	₩.	m	œ	æ	æ	В	B	ш	В	FO	т	(NB)*	(1) LOS A.M Peak
₩	To the second se	Т	8	п	F0	F1	FO	F2	FO	F0	7	FO	т	FO	т	TI .	FO	FO	æ	В	B	B	В	₩	8	(NB)	(2) LOS
8	and well and standard and standard and	ш	В	ш	Ţ	F1	FO	Ŧ	FO	FO	FO	m	æ	т	w	B	8	00	æ	В	æ	8	A	В	8	(SB)*	(3) LOS
В	ADVARLISTRALIPORTURE AND MILLERY PRO-	8	B	8	8	FO	F0	Ŧ	FO	FO	Ŧ	F0	m	m	₿	FO	FO	FO	8	В	В	т	В	M	FO	(SB)*	(4) LOS

Bikeway Classifications

Class I Bikeway (Bike Path):

Provides a completely separated right of way for the exclusive use of bicycles and pedestrians with crossflow minimized.

Class II Bikeway (Bike Lane):

Provides a restricted right-of-way (striped lane) for the exclusive or semi-exclusive use of bicycles with through travel by motorized vehicles or pedestrians prohibited but with cross flows by pedestrians and motorists permitted.

Class III Bikeway (Bike Route):

Provides for shared use with pedestrian or motor vehicle traffic.

New Technology

Intelligent Transportation Systems (ITS)

both of these projects is to apply several new technologies in an effort to optimize traffic flow. on-ramp traffic flow. The second ITS project is the Integrated Freeway Ramp Meter/Arterial Surveillance and Communications Project. This project locates portable trailers at critical Intelligent Transportation System (ITS) projects. The first of these is the Mobile Video Adaptive Signal Control Project. This project will allow for the joint monitoring of the I-5 and locations along the highway to monitor flow conditions on the mainline and interactively regulate There are currently two pilot projects on-going in Orange County which may be considered as I-405 interchange area and Alton Parkway by the District and the City of Irvine.

Intelligent Vehicle Highway Systems (IVHS)

components necessary to implement a fully functional IVHS. These three are discussed below. These systems utilize what is also commonly referred to as smart systems. There are three basic

o Advanced Traveler Information Systems (ATIS)

This type of system would provide the motorist with real-time traffic routing information. television, radio, telephone and personal computer. Information could be routed to This information could be provided to the motorist using virtually any medium including offices, homes or even directly to an in-vehicle device.

o Advanced Traffic Management Systems (ATMS)

systems and Advanced Traveler Information System (ATIS) for electronic detection and evaluations and the policies and procedures to be required for automated highway interface with real-time TOS information. Other areas of research include bottleneck These systems include the potential use of Automatic Vehicle Identification (AVI)

o Automated Vehicle Control Systems (AVCS)

that these systems are more long term innovations but do have a high potential for below) is currently researching both types of driving control systems. It is anticipated system which automates vehicle spacing, or the distance between vehicles. PATH (see are two basic types of driving control offered for use of this new technology. First is the feasible implementation. lateral control system which controls vehicle steering, and the second is the longitudinal AVCS. These systems can electronically enhance or automate driving functions. There The greatest potential for improving highway safety within the IVHS technologies is the

Showcase for IVHS - The Priority Corridor

system. It is meant to serve as a living laboratory for new developments in transportation. transportation network with all possible new technologies in place and integrated. This comprehensive and coordinated approach should reveal new capabilities of the transportation The Priority Corridor proposal is an endeavor to demonstrate the actual full potential of the

population and jobs in California. It is being viewed as a Showcase for IVHS. This plan non-attainment area and experiences severe congestion. The corridor is host to over half the a myriad of intermodal systems for moving people and goods. It is also an air quality on the east by SR-71, I-15 and I-215; on the south by the U.S. border with Mexico, the Otay Intermodal Transportation Management and Information System (ITMIS). proposes to take full advantage of four Transportation Management Centers (TMC's), IVHS and Mesa Border crossing and SR-905; and on the west by the Pacific Ocean. This corridor includes The Priority Corridor is geographically described as: bounded on the north by SR-126 and I-210;

systems within the corridor. A cooperative effort among Caltrans, CHP, regional, county and optimize and coordinate freeway and street operations with public and private transportation systems. Deployment and implementation of these different technologies will attempt to information systems, passenger and fleet management systems, as well as freight vehicle control city governments and the MPOs is essential to the success of Priority Corridor operations. opportunity to evaluate intermodal technologies, traffic management techniques, traveler it an ideal proving ground for new technology. These factors also provide an excellent Consequently, the numerous and diverse difficulties experienced within the corridor area render

New Technology Research and Development

costs and feasibility. systems and electronic braking. PATH also analyzes ATIS, IVHS and ATMS developments for and Highways (PATH). PATH researches new technologies such as warning and avoidance Caltrans and University of California at Berkeley have established Partners for Advanced Transit

agencies, and academic institutions on the research, development and implementation of new technology is necessary to obtain optimum efficiency of the system. technology in the development of the transportation system. The implementation of new The District is committed to working with cities, the county, regional agencies, other state

Urban Freeway Standards

required for efficient operation of the state highway system. Following is an excerpt from that (TOS) Plan for District 12. The TOS Plan outlined the traffic system management elements In April 1992 the Transportation Planning Branch completed a Transportation Operation Systems

provide the following benefits: defined as transportation corridors, which have all system elements satisfied and will "The goal of the Plan is to develop ultimate urban and regional freeways and highways."

- Operate facilities at maximum efficiency
- Minimize and manage travel delay and congestion
- Disseminate motorist information using advanced technologies.

The typical urban freeway operations plan includes:

- Electronic Loop Detectors
- Closed Circuit Television (CCTV)
- Changeable Message Signs (CMS)
- Highway Advisory Radio (HAR)
- Freeway Ramp Meters
- Fiber Optic Communications System
- Traffic Management Center (TMC)
- Major Incident Response Teams
- Motorist Call Boxes
- Freeway Service Patrols (FSP)
- Airborne Surveillance
- Smart Corridor Interface with Local Agencies
- High Occupancy Vehicle (HOV) Facilities.
- Maintenance Pullouts

such as loop detectors and CCTV." teletext services (Commuter TV). Management of data includes monitoring technologies make informed route decisions by using CMS, HAR, In-Vehicle Navigation Systems and include provision of real-time information on traffic conditions to allow motorists to freeway incident response teams, and FSP. Methods to disseminate motorist information metering, freeway incident detection and confirmation (CCTV surveillance, etc.), Methods to achieve maximum efficiency on transportation facilities include: ramp

projects were identified which neither had funding nor implementation schedules. proposed to be included as an element of larger projects (widening/reconstruction, adding HOV implementation schedules. Because of potential cost savings several other projects were Several TOS elements were identified as individual projects with identified funding and importantly the updated version looked closer at actual implementation plans and schedules. Plan refined definitions and uses of the various technologies outlined in the original report. More The TOS Plan was updated by Traffic Operations in January 1994. This iteration of the TOS lanes, etc.); however in many of these cases no funding was identified. Finally, several new

implement these items as part of larger projects in order to save on project development and route in Orange County up to urban freeway standards. It may be most cost effective to route concepts in Orange County. It is the goal of Caltrans District 12 to bring each freeway Full implementation of the TOS Plan elements is an integral part of this and all other freeway engineering costs.


New Technology

as "new technology". It would also be appropriate to consider most of these elements as Traffic TECHNOLOGY for a brief outline of new technology programs and some implementation Orange County, both on and off the State Highway System. Please see Appendix 4 - NEW STANDARDS section other New Technology programs are currently being implemented in between them. In addition to the TOS elements mentioned above in the URBAN FREEWAY advantage of new technology and these categories have a good deal of crossover application System Management (TSM) elements. Most of the above mentioned TOS elements take full efforts currently underway in Orange County. There are several elements of the existing and future transportation system which are referred to


SmartStreet strategies can include technologies and elements utilized for TSM, TOS, and ITS.

APPENDIX 6 CONCEPT SYSTEM CONFIGURATION


Year 1997 System Configuration

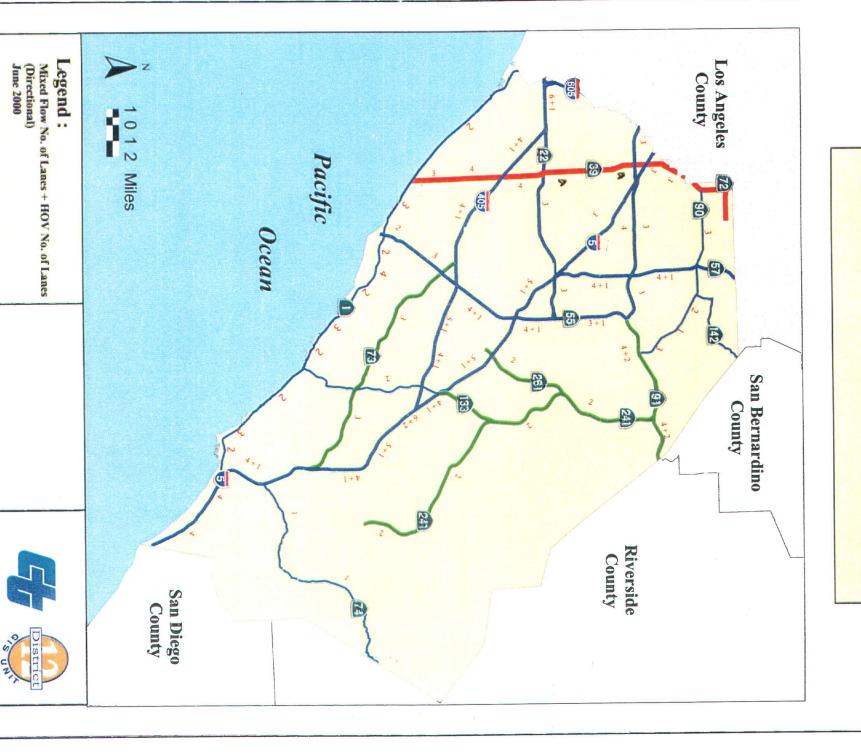

Year 2020 Null System Configuration

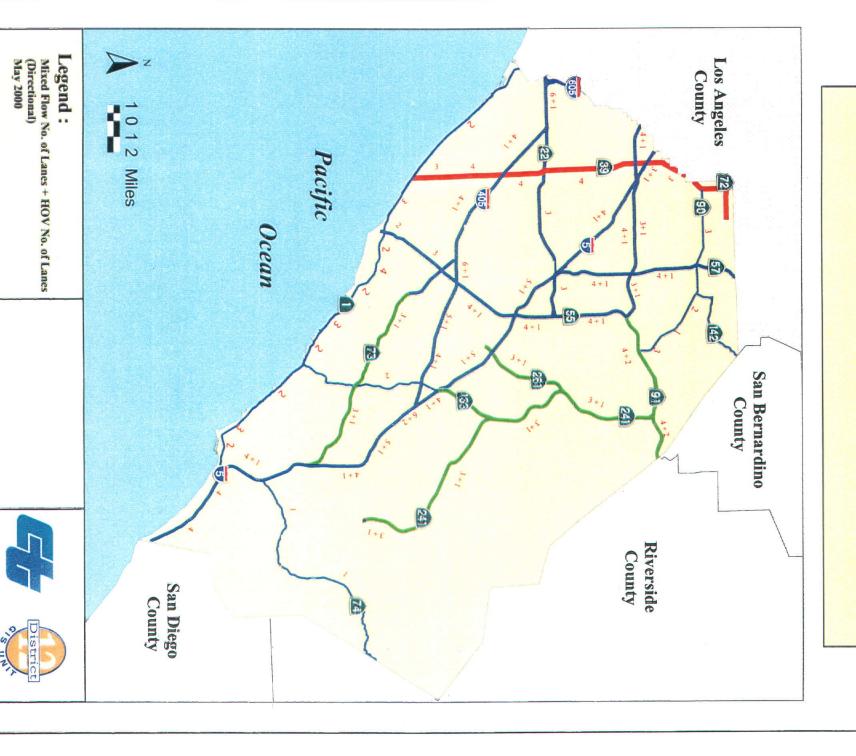

Year 2020 Concept System Configuration

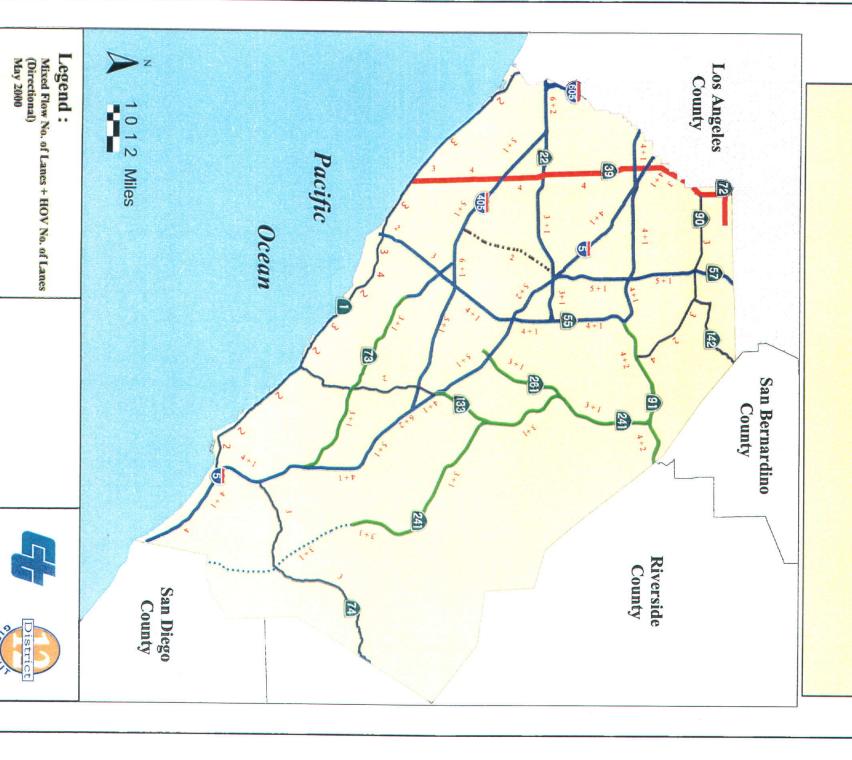

Appendix 7

Mitigation Measures

- bicycle, and pedestrian plans and programs in the development process corridor linkages for businesses and residents by incorporating rail, transit, Multimodal Transportation Network: Provides vital intra-corridor and inter-
- private (transit) bus service, and shuttle services. Rail/Transit: Includes commuter rail, intercity rail, public (transit) bus service,
- transportation network, rail/transit, and HOV lanes. Park and Ride Facilities: Provides park and ride lots to support a multimodal
- advanced communications systems to dispatch vehicles to accidents, traffic traveler information systems such as changeable message signs on freeways, management centers, and information clearinghouse strategies. personalized travel information services. Examples of ITS applications include alleviate traffic congestion using methods ranging from real-time management to Intelligent Transportation Systems (ITS): Use of technology to both prevent and
- occupancy vehicles, computerized signals, signs, signals, and pavement management, incident response, priority designation for transit and/or high restriping, ramp meters, meter bypass lanes, parking management, special event highway system without significantly increasing capacity. Examples include: include those that increase the number of person-trips that can be carried on the (TOS): Provides for optimum utilization of the existing infrastructure. Projects Transportation System Management (TSM) and Traffic Operations Systems

ACRONYMS

ADT - Average Daily Traffic

ATMS - Advanced Traffic Management System

ATIS - Advanced Traveler Information Systems

AVCS - Automated Vehicle Control Systems

AVI - Automatic Vehicle Identification

CBD – Central Business District

CCTV - Closed Circuit Television

CHP - California Highway Patrol

CMS - Changeable Message Sign

DSMP – District System Management Plan DOD- Department of Defense

EB - Eastbound

EIR - Environmental Impact Report

ETC - Eastern Transportation Corridor

FAA - Federal Aviation Aministration

FCR - Flexible Congestion Relief

FSP - Freeway Service Patrol

FTA – Federal Transit Act

FTC- Foothill Transportation Corridor

HOV - High Occupancy Vehicle

HOT-HOV/Toll

I – Interstate

IGR - Intergovernmental Review

ITS – Intelligent Transportation Systems

ITMS – Inter-modal Transportation Management System

ITMIS - Inter-modal Transportation Management and Information System

IVHS - Intelligent Vehicle Highway System

LARTS - Los Angeles Regional Transportation Study

LBT - Laguna Beach Transit

LOS - Level Of Service

LOSSAN – Los Angeles – San Diego Rail Corridor

LRA - Local Redevelopment Authority

MCAS – Marine Corps Air Station

MPAH - Master Plan of Arterial Highways

MPO - Metropolitan Planning Organization

NB - Northbound

NHS - National Highway System

NTA - National Transportation Authority

OCEMA - Orange County Environmental Agency OCTA - Orange County Transportation Authority

OHC - Other Highway Construction

PATH - Partners for Advanced Transit and Highways

PM - Post Mile

PPN - Planning and Program Number

PSR - Project Study Report

RAS - Rehabilitate and Safety

RCR - Route Concept Report

RME - Regional Mobility Element

RTIP - Regional Transportation Improvement Plan

SANDAG - San Diego Association of Governments

SB - Southbound

SCRRA - Southern California Regional Rail Authority

SCAG - Southern California Association of Governments

SHELL - Subsystem of Highways for the movement of Extra Legal Loads

SHOPP - State Highway Operation Project Plan

SJHTC - San Joaquin Hills Transportation Corridor

SR - State Route

STIP - State Transportation Improvement Program

STRAHNET – STRategic Highway NETwork

TASAS - Traffic Accident Surveillance and Analysis System

TMC - Transportation Management Center

TMC – Transportation Monitoring Center

TOS – Traffic Operation System

TSM - Traffic System Management

TSM - Transportation System Management

UCI - University of California Irvine

WB - Westbound

References

Orange County Bikeways Map (1999) OCTA

Traffic Accident Surveillance and Analysis System (TASAS) (1999)

OCTA Transit Guide, June 2000

OCTA Congestion Management Plan (CMP) 1999

Traffic Operation Systems Plan (4/92 and 1/94)

Transportation System Development Plan - District 12 (7/95, 7/99)

Orange County Master Plan of Arterial Highways - 1999

1997 Annual Average Daily Truck Traffic on the California State Highway System

1998 Traffic Volumes on California State Highways

Regional Transportation Plan (RTP) 1998 SCAG

General Plans/Various Cities

Los Angeles Regional Transportation System (LARTS)

Caltrans - Transportation Programming Division

Caltrans - Office of Truck Services

Beach Boulevard SmartStreet Project - July 1993, OCTA

District System Management Plan (DSMP) District 7, 1996

Caltrans Library and History Center, Headquarters

Telephone Interviews with Cities (Planning/Community Development/Traffic)